

iDS-96000NXI-I16(B) DeepinMind Series NVR

Key Feature

- Intelligent analytics based on deep learning algorithm
- Up to 64/128-ch network camera input for iDS-96064/96128NXI-I16(B)
- Up to 512 Mbps incoming and outgoing bandwidth for iDS-96128NXI-I16(B)
- Up to 20-ch@1080p decoding capability
- 16 SATA interfaces (up to 10 TB capacity for each HDD)
- HDD hot swapping with RAID 0/1/5/6/10
- Redundant power supply
- 7-inch LCD touch-screen for iDS-96128NXI-I16(B)
- H.265+/H.265/H.264+/H.264 self-adaptive video formats



Profession and Reliability

- H.265+ compression effectively reduces the storage space by up to 75%
- Adopt professional embedded hardware (Intel® processor) and software, and pioneering dual-OS design to ensure the reliability of system running.
- Redundant power supply ensures system stability
- ANR (Automatic Network Replenishment) technology enhances storage reliability when network exception occurs

Video and Storage

- Compatible with third-party network cameras, such as ACTI, Arecont, AXIS, Bosch, Brickcom, Canon, ONVIF, PANASONIC, Pelco, SAMSUNG, SANYO, SONY, Vivotek and ZAVIO
- 16 SATA interfaces (up to 10 TB capacity per HDD), 1 eSATA interface and 2 miniSAS interfaces (for iDS-96128NXI-I16(B)) provided for HDD connection



Network & Ethernet Access

- 4 self-adaptive 10M/100M/1000M Ethernet interfaces
- Hik-Connect & DDNS (Dynamic Domain Name System) for easy network management
- 4 gigabit Ethernet SFP fiber interfaces for iDS-96128NXI-I16(B)

Live view and Playback

- Up to 20-ch@1080p decoding for live view
- Up to 16-ch synchronous playback at 1080p resolution
- Simultaneous HDMI 1/HDMI 2 output as main output and VGA works as auxiliary output
- Dual 4K (4096 × 2160) HDMI outputs


Application and Management

- Centralized management of network cameras, including configuration, information import/export, real-time information display, two-way audio, upgrade, etc.
- Configurable network camera smart functions, such as VCA detection (motion, line crossing, intrusion, etc.), heat map, ANPR, and people counting
- Deep learning based video analytics for false alarm reduction, facial recognition and face picture comparison
- VCA search for facial detection, false alarm reduction, people counting and heat map

Typical Application


Facial Recognition and Face Picture Comparison

Modeling and analyzing face pictures captured by cameras. Realize blacklist alarm and stranger alarm via face picture library. Search target people by picture and name features.

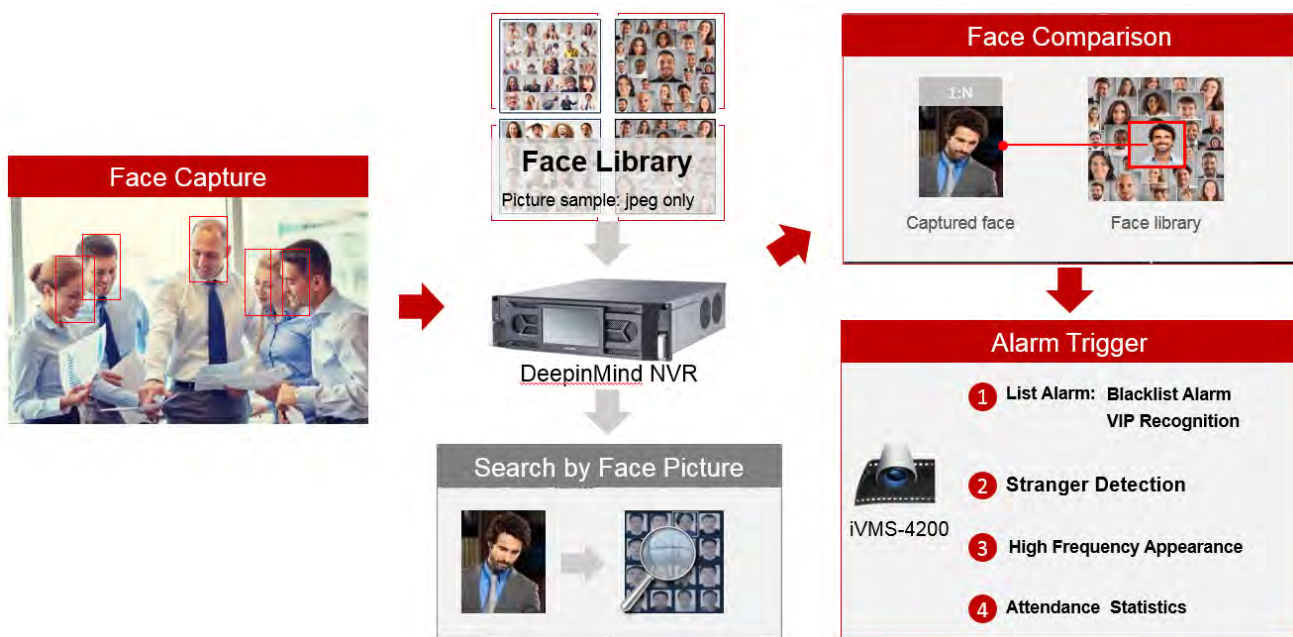

False Alarm Reduction

Adopt deep learning algorithm to reduce false alarm, effectively reduces the false alarm caused by tree branches, leaves, shadow, light, vehicles, small animals, etc.

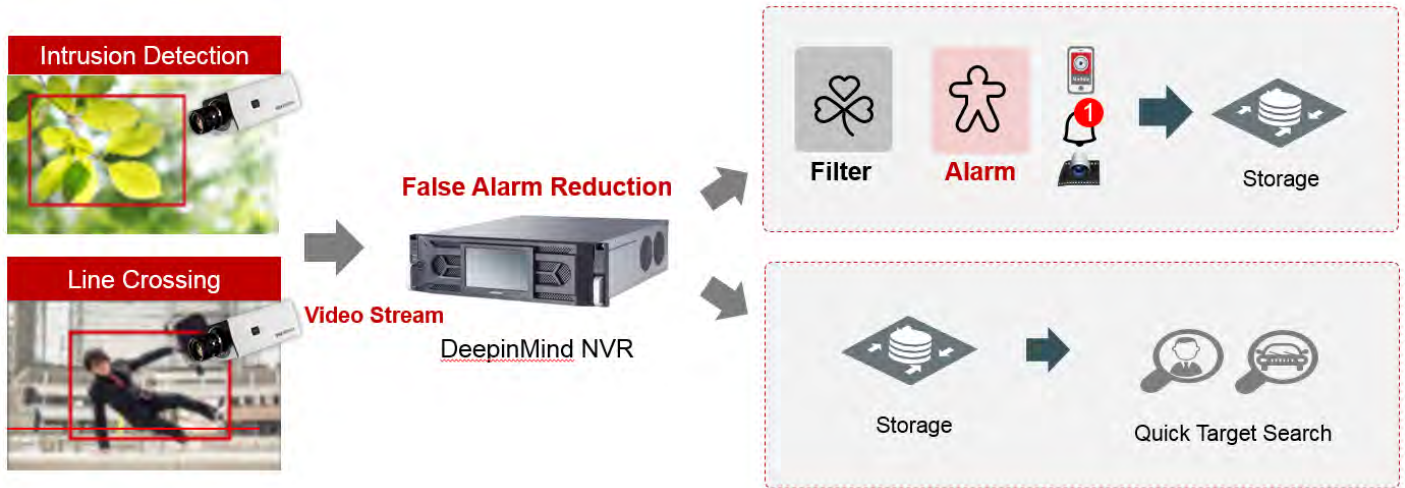


Specification

Model	iDS-96064NXI-I16(B)	iDS-96128NXI-I16(B)
Smart Analysis		
Facial detection and analytics	Face picture comparison, human face capture, face picture search	
Face picture library	Up to 32 face picture libraries, with up to 300,000 face pictures in total	
Face picture comparison	24-ch face picture comparison alarm	48-ch face picture comparison alarm
Performance of facial detection and analytics	12-ch human face capture (HD network camera, up to 4 MP, H.264/H.265)	24-ch human face capture (HD network camera, up to 4 MP, H.264/H.265)
Human/Vehicle Analysis		
False alarm reduction	Up to 48-ch 2 MP (H.264/H.265) video analysis for human and vehicle recognition to reduce false alarm	Up to 96-ch 2 MP (H.264/H.265) video analysis for human and vehicle recognition to reduce false alarm
Video and Audio		
IP video input	64-ch	128-ch
	Up to 12 MP resolution	
Incoming/outgoing bandwidth	400 Mbps/400 Mbps	512 Mbps/512 Mbps
VGA output	1-ch, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz	
HDMI output	2-ch independent HDMI interface, 4K (4096 × 2160)/30Hz, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz	
LCD output	N/A (7-inch LCD optional)	7-inch LCD
Audio input	1-ch, RCA (2.0 Vp-p, 1 KΩ)	
Audio output	1-ch, RCA (2.0 Vp-p, 1 KΩ)	
Two-way audio input	1-ch, RCA (2.0 Vp-p, 1 k Ω)	
Decoding		
Decoding format	H.265+/H.265/H.264+/H.264/MJPEG/MPEG4	
Recording resolution	12 MP/8 MP/7 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p /VGA/4CIF/DCIF/2CIF/CIF/QCIF	
Synchronous playback	16-ch	
Capability	5-ch@8 MP(30 fps)/10-ch@4 MP(30 fps)/20-ch@1080p(30 fps)/40-ch@720p(30 fps)	
Dual-stream recording	Support	
Stream type	Video, Video & Audio	
Audio compression	G.711ulaw/G.711alaw/G.722/G.726/MP2L2	
Network		
Remote connections	128	256
Network protocol	IPv6, HTTP, HTTPS, UPnP, SNMP, NTP, SADP, SMTP, NFS, iSCSI, PPPoE, DDNS	
Network interface	4, RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface	
Interoperability	Profile S client	
Network mode	Net Fault-Tolerance, Load Balance, Multi-address	
RAID		
RAID Type	RAID0, RAID1, RAID5, RAID6, and RAID10 (at least 4 TB for each HDD)	

Auxiliary interface		
Fiber interface	N/A (optional)	4, gigabit Ethernet SFP interface (on extension board)
Serial port	RS-232; RS-485 (full-duplex); Keyboard	
SATA	16 SATA interfaces supporting hot-plug	
Capacity	Up to 10 TB capacity for each disk	
eSATA	1 eSATA interface	
MiniSAS	N/A (2 miniSAS interfaces optional)	2 miniSAS interfaces
Alarm in/out	16/8	48/24 (main board: 16/8; extension board: 32/16)
USB interface	Front panel: 2 × USB 2.0; Rear panel: 2 × USB 3.0	
Extension board	N/A (optional to support)	1; With 4 × gigabit Ethernet SFP interfaces, 8 × RS-485 (full-duplex), 32 alarm inputs, and 16 alarm outputs
General		
Processor	Dual-Core Intel® Core® i3	Quad-Core Intel® Xeon® E3
Memory	8GB	
Power supply	100 to 240 VAC, redundant power supply, 550W	
Fan	Dual ball bearing fan; Speed adjustable; Hot-plug	
Consumption (without HDD)	≤ 140W	
Working temperature	0 °C to 50 °C (32 °F to 122 °F)	
Working humidity	10% to 90%	
Dimension (W × D × H)	442 × 494 × 146 mm (17.4 × 19.4 × 5.7 inch)	447 × 528 × 172 mm (17.6 × 20.8 × 6.8 inch)
Weight (without HDD)	≤ 20 kg (44 lb)	≤ 23 kg (50.7 lb)
Certification		
FCC	SHEM190301156501ATC	
CE	SHEM190301156401ATC	






Dimension

For iDS-96064NXI-I16(B)

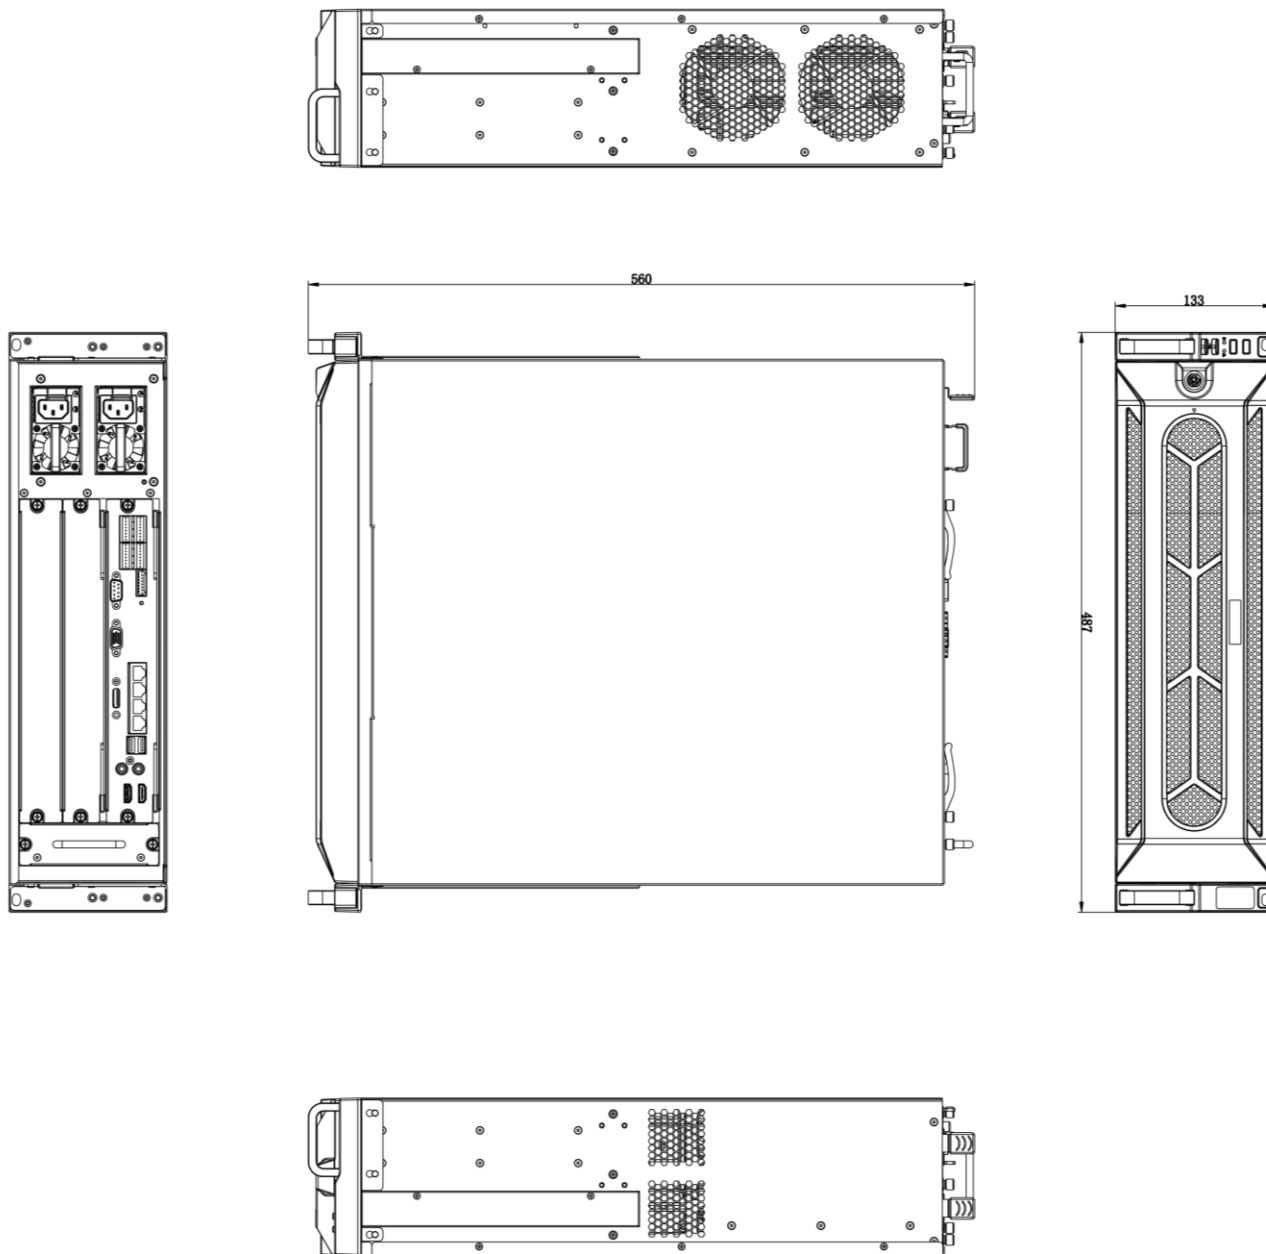


Unit: mm

For iDS-96128NXI-I16(B)

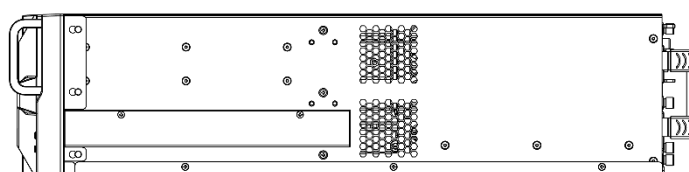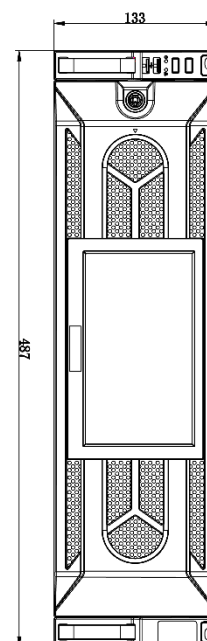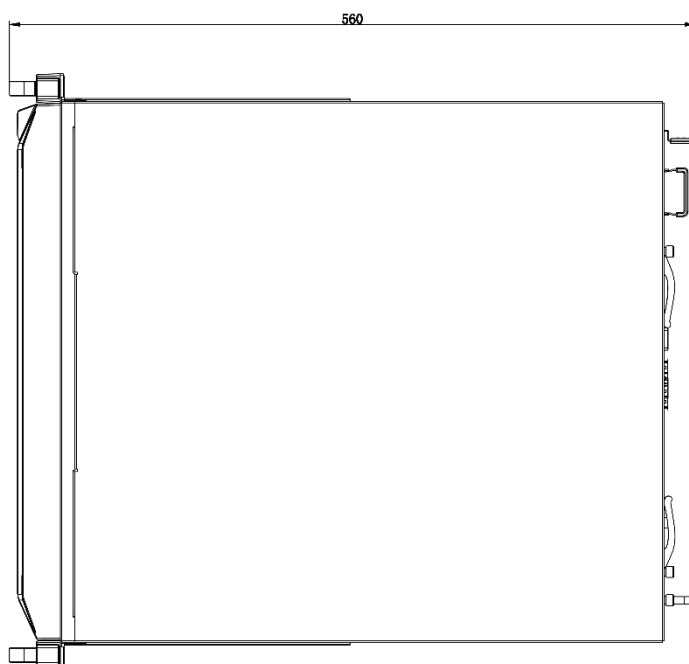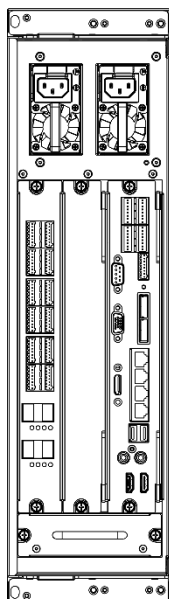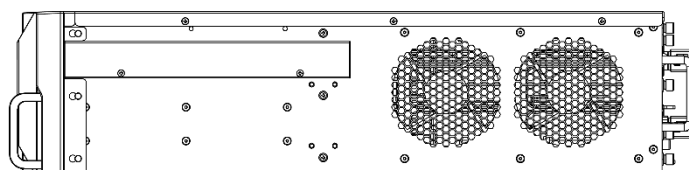

Unit: mm

Physical Interfaces

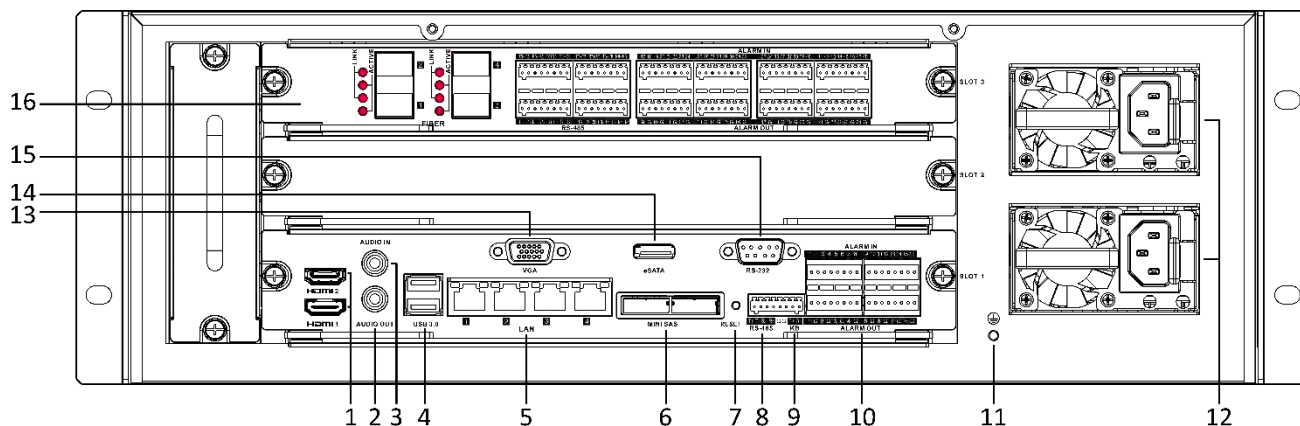

No.	Description	No.	Description
1	HDMI1/HDMI2 Interface	9	Keyboard Interface
2	AUDIO OUT, RCA Connector	10	ALARM IN/OUT
3	AUDIO IN, RCA Connector	11	Ground
4	USB 3.0 Interface	12	100 to 240 VAC Power Supply
5	LAN Network Interface	13	VGA Interface
6	MiniSAS Interface (only available for iDS-96128NXI-I16(B))	14	eSATA Interface
7	Reset Button	15	RS-232 Interface
8	RS-485 Interface	16	Extension Board (only available for iDS-96128NXI-I16(B))

Available Models

iDS-96064NXI-I16(B), iDS-96128NXI-I16(B)

Distributed by

0401601090424



Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8589-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
latam.support@hikvision.com

Hikvision Turkey
T +90 (216) 521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com