


HIKVISION CONFIDENTIAL INFORMATION
UNAUTHORIZED DIFFUSION IS PROHIBITED

SECURITY CLASSIFICATION: AA

DWG NO:
A3

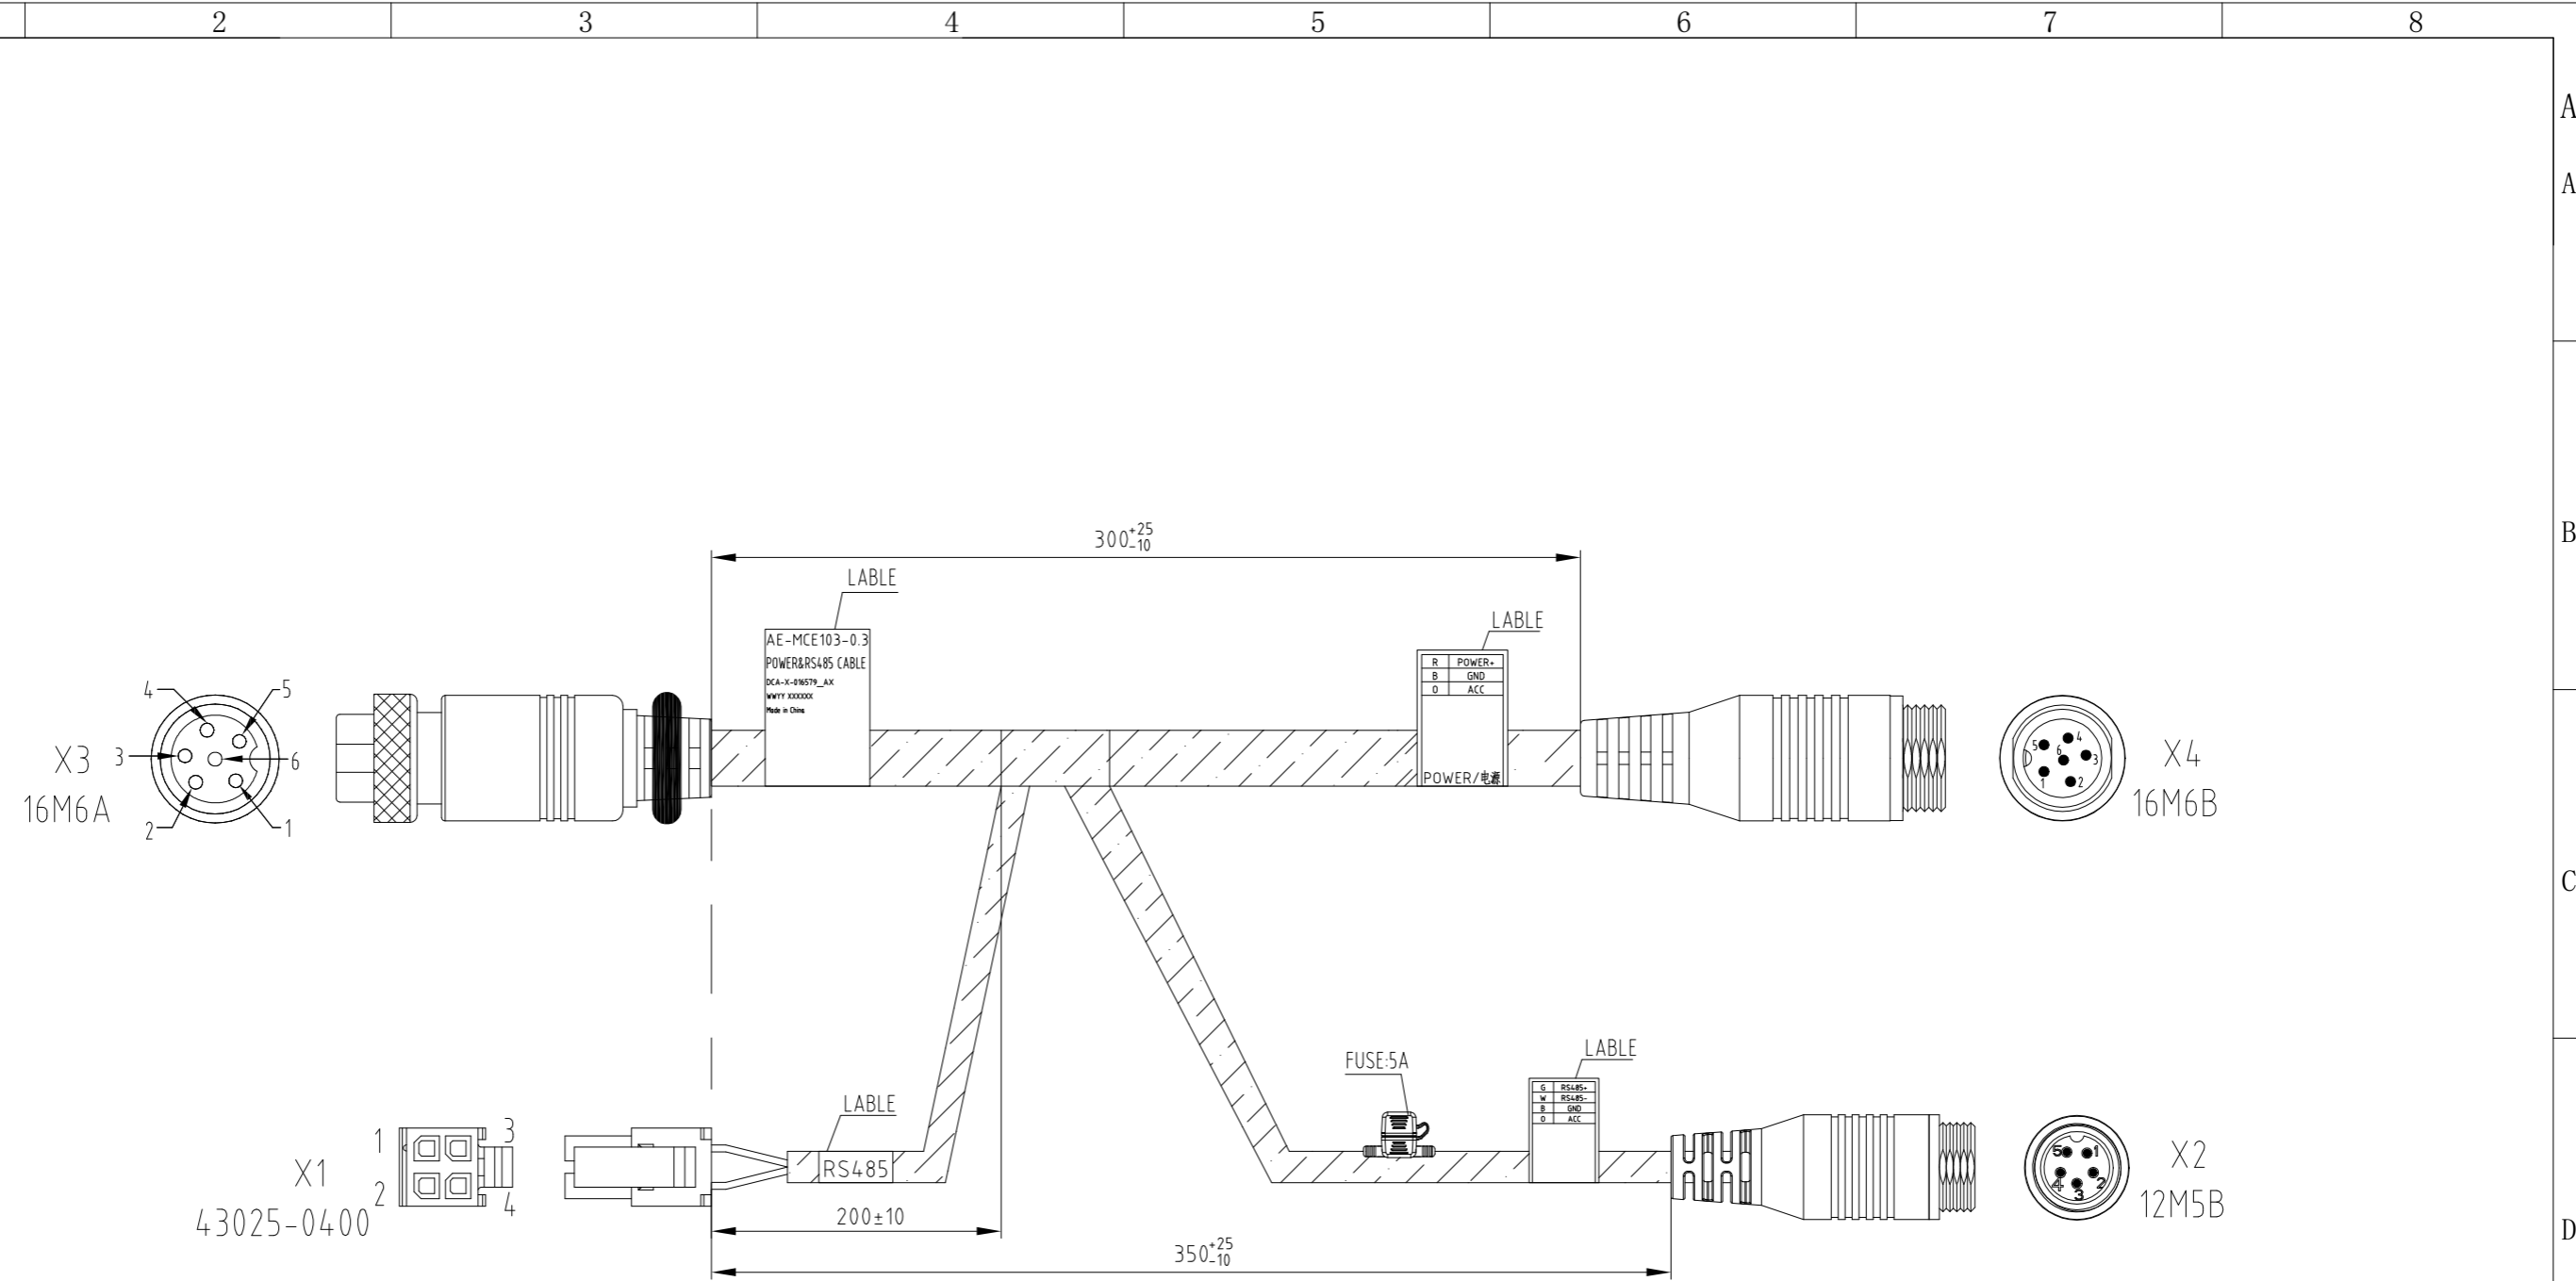


PIN ASSIGNMENT:

X1	Colour	X2	X3	X4	Signal
2	GN	3			RS485+
4	WH	2			RS485-
1	BK	4			GND
	OR	5	6	6	ACC
	RD		1	1	DC+
			2	2	
	BK		3	3	DC-
			4	4	
			5	5	



NOTES:

- All the materials must be compliant RoHS, Working temperature: $-40 \sim 105^{\circ}\text{C}$;
- Settle for: QC/T29106-2014 《Technical specification of automobile wire harness》;
- Process conforms to the IPC620 standard 3;

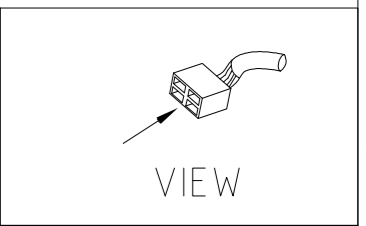

NO.	REV	DESCRIPTION	AREA	BY	DATE
<1>					
DESIGN		PART NAME: AE-MCE103-0.3 (POWER&RS485 CABLE)	PART NO: 309502403	HIKVISION HANGZHOU HIKVISION DIGITAL TECHNOLOGY CO. LTD.	
APPROVED		DWG NO: DCA-X-016579	REV: A2		
STANDARD		MATERIAL:	WEIGHT:	GRADE:	FIRST ANGLE
MCODE		FINISH:	FIRST_USED_ON	SCALE: 1:1	SIZE: A3
					SHEET 1 OF 1

(Conform to the requirements of the RoHS).