



HIKVISION CONFIDENTIAL INFORMATION
UNAUTHORIZED DIFFUSION IS PROHIBITED

SECURITY CLASSIFICATION: AA

DWG NO:
A3

1	2	3	4	5	6	7	8
L (M)	TOL(L ₁ L ₂)	PART NAME					
3 M	±50	AE-MC3029-3CT (12M5A转12M5B,波纹管)					
5 M	±50	AE-MC3029-5CT (12M5A转12M5B,波纹管)					
8 M	±100	AE-MC3029-8CT (12M5A转12M5B,波纹管)					

X1
12M5B

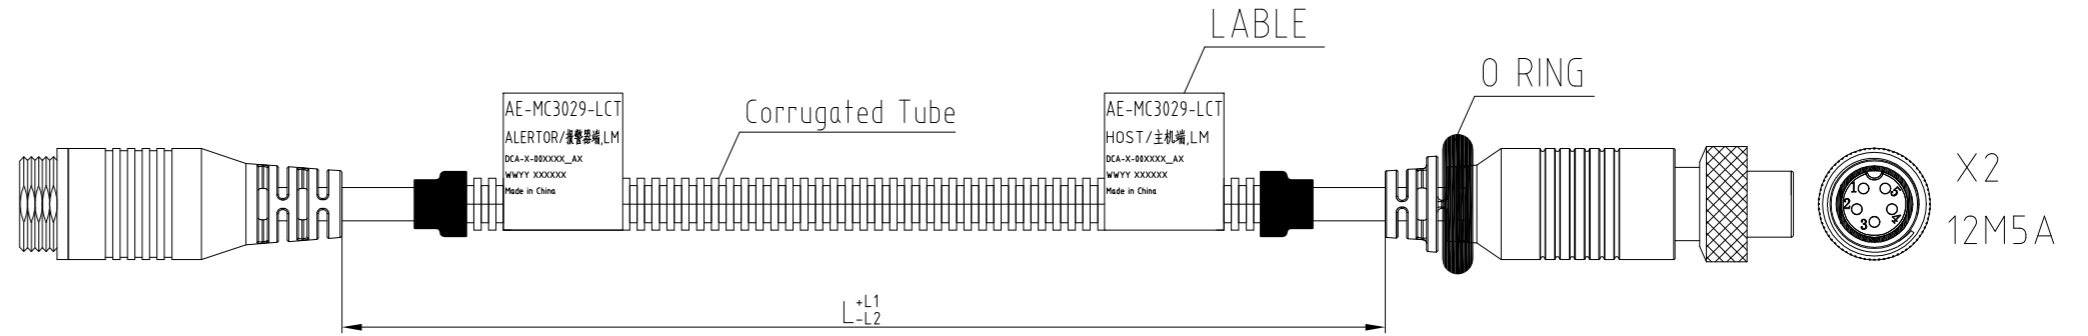


PIN ASSIGNMENT:

X1	Colour	X2	Signal
1	R	1	5V
2	W	2	485-
3	G	3	485+
4	B	4	GND
5	W/R	5	12V



NOTES:

- All the materials must be compliant RoHS, Working tempature: -40~105°C;
- Settle for: QC/T29106-2014《Technical specification of automobile wire harness》;
- Process conforms to the IPC620 standard 3;

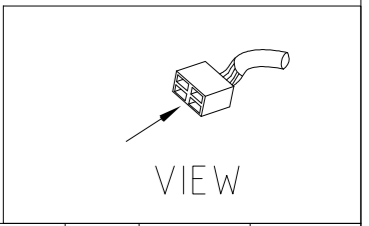

NO.	REV	DESCRIPTION 修改记录	AREA	BY	DATE
<1>					
DESIGN		PART NAME: AE-MC3029-LCT (12M5A to 12M5B,CV)	PART NO:		
APPROVED		DWG NO:	REV:	STATE:	HIKVISION HANGZHOU HIKVISION DIGITAL TECHNOLOGY CO. LTD.
STANDARD		MATERIAL:	WEIGHT:	GRADE:	
MCODE		FINISH:	FIRST_USED_ON	FIRST ANGLE	SCALE
				1:1	SIZE: A3
					SHEET 1 OF 1

(Conform to the requirements of the RoHS)