


HIKVISION CONFIDENTIAL INFORMATION
UNAUTHORIZED DIFFUSION IS PROHIBITED

SECURITY CLASSIFICATION: AA

DWG NO:
A3

1	2	3	4	5	6	7	8
L (M)	TOL(L ¹ / ₂)	PART NAME					
5 M	±50	AE-MC3029-5WP (12M5A to 12M5B)					
8 M	±100	AE-MC3029-8WP (12M5A to 12M5B)					

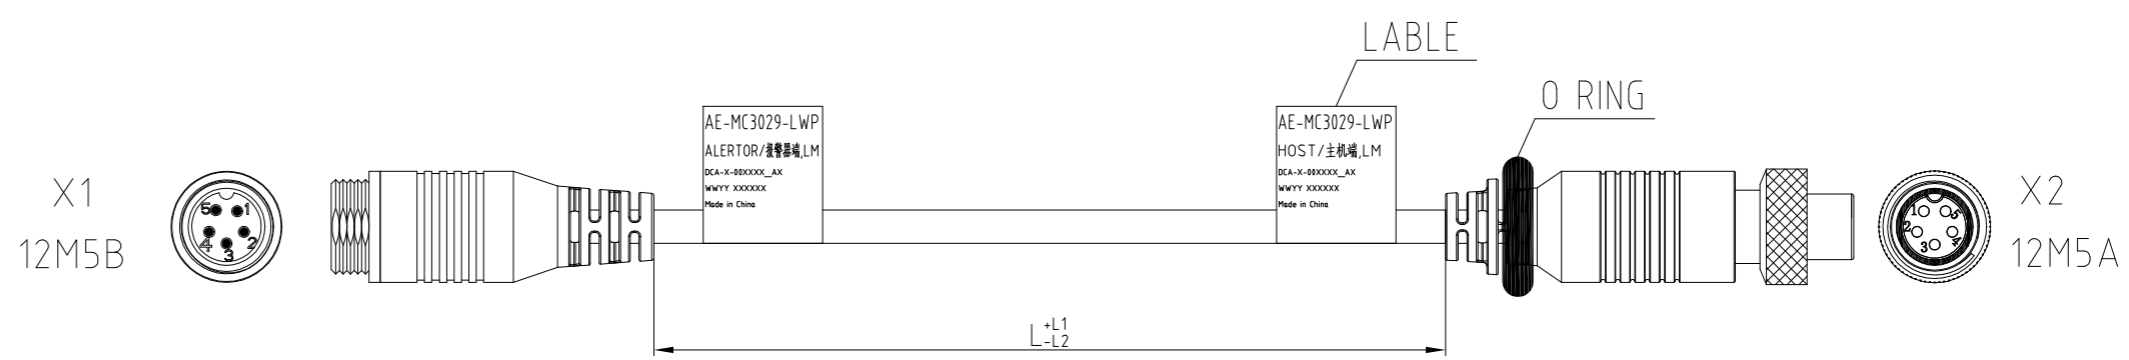


PIN ASSIGNMENT:

X1	Colour	X2	Signal
1	R	1	5V
2	W	2	485-
3	G	3	485+
4	B	4	GND
5	W/R	5	12V



NOTES:

- 1.All the materials must be compliant RoHS,Working tempature: -40~105°C;
- 2.Settle for: QC/T29106-2014《Technical specification of automobile wire harness》;
- 3.Process conforms to the IPC620 standard 3;

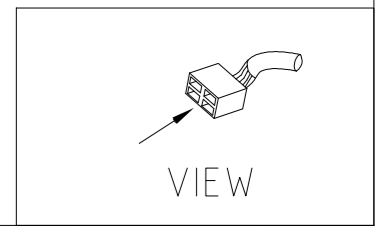

<1>								
NO.	REV	DESCRIPTION 修改记录				AREA	BY	DATE
DESIGN		PART NAME:	AE-MC3029-LWP (12M5A to 12M5B)	PART NO:		HIKVISION HANGZHOU HIKVISION DIGITAL TECHNOLOGY CO. LTD.		
APPROVED		DWG NO:		REV:	STATE:			
STANDARD		MATERIAL:		WEIGHT:	GRADE:	FIRST ANGLE	SCALE	SIZE: A3
MCODE		FINISH:		FIRST_USED_ON			1:1	SHEET 1 OF 1

(Conform to the requirements of the RoHS)