

HIKAUTO CONFIDENTIAL INFORMATION  
UNAUTHORIZED DIFFUSION IS PROHIBITED



SECURITY CLASSIFICATION: AA

D

E

DWG NO:  
A3

Serial Num.	Description	Quantity	TYPE
1	Cable, 26AWG×2P+Braid+Drain+AL/MY, OD5.0, TPU HF Jacket, Black.		
2	M12, D Code, Male, IP68, 4Pin, Amphenol LTW	2pcs	---

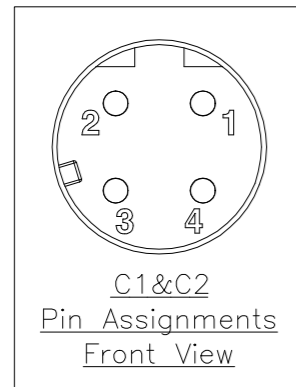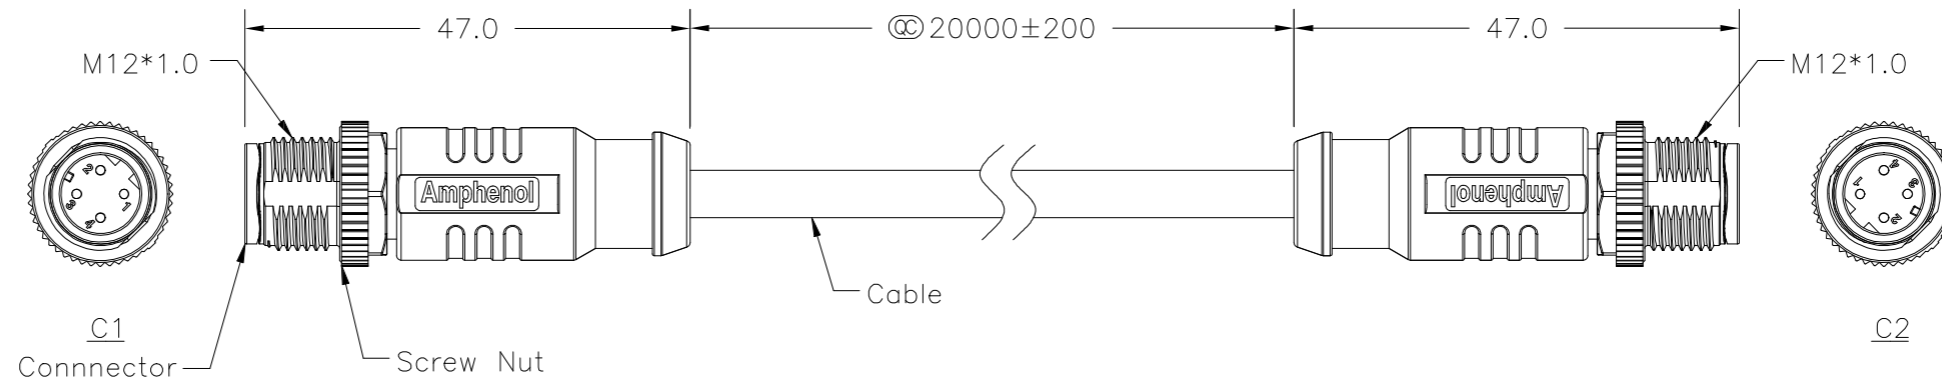

Shield	Braid+Drain	Shield
4	Green	4
3	Orange	3
2	White/Green	2
1	White/Orang	1
C1	Wire Color	C2

Twist  
Twist

NOTES:

- Operating Temperature -40~85°C
- All materials meet RoHS requirement

NO.	REV	DESCRIPTION 修改记录	AREA	BY	DATE
<1>					
DESIGN		PART NAME: AE-MC4343-20 (M12D4M to M12D4M, 100M)	PART NO:		
APPROVED		DWG NO: DCA-X-004807_A2	REV:	STATE:	HANGZHOU HIKVISION DIGITAL TECHNOLOGY CO. LTD.
STANDARD		MATERIAL:	WEIGHT:	GRADE:	FIRST ANGLE SCALE SIZE: A3
MCODE		FINISH:	FIRST USED_0		1:1 SHEET 1 OF 1

符合RoHS要求 (Conform to the requirements of the RoHS).