


HIKVISION CONFIDENTIAL INFORMATION  
UNAUTHORIZED DIFFUSION IS PROHIBITED

SECURITY CLASSIFICATION:AA

DWG NO:  
A3


X1  
M12D4M

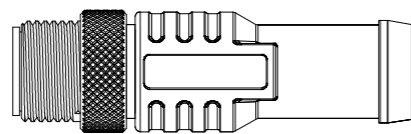

500<sup>+25</sup><sub>-10</sub>

Cable


AE-MC4347-0.5  
DCA-X-016730\_AX  
WVYY XXXXXX  
Made in China

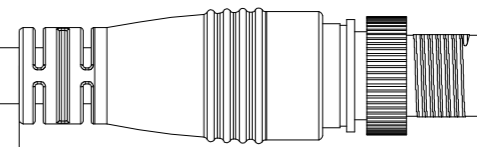

X2  
M12X8M


PIN ASSIGNMENT:

X1	Colour	X2	Signal
1	Y	1	RX+
3	O	2	RX-
2	BL	3	TX+
4	G	4	TX-
Shell	E+B	Shell	Shield



NOTES:

- All the materials must be compliant RoHS, Working temperature: -40~105°C;
- Settle for: QC/T29106-2014《Technical specification of automobile wire harness》;
- Process conforms to the IPC620 standard 3;

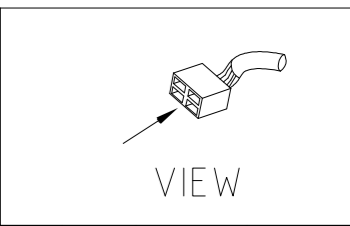

NO.	REV	DESCRIPTION	AREA	BY	DATE
<1>					
DESIGN		PART NAME: AE-MC4347-0.5 (M12D4M to M12X8M)	PART NO: 309502406	<b>HIKVISION</b> HANGZHOU HIKVISION DIGITAL TECHNOLOGY CO. LTD.	
APPROVED		DWG NO: DCA-X-016730	REV: A1		
STANDARD		MATERIAL:	WEIGHT:	GRADE:	FIRST ANGLE
MCODE		FINISH:	FIRST_USED_ON	SCALE: 1:1	SIZE: A3
					SHEET 1 OF 1

(Conform to the requirements of the RoHS).