


HIKVISION CONFIDENTIAL INFORMATION
UNAUTHORIZED DIFFUSION IS PROHIBITED


SECURITY CLASSIFICATION: AA

DWG NO:
A3

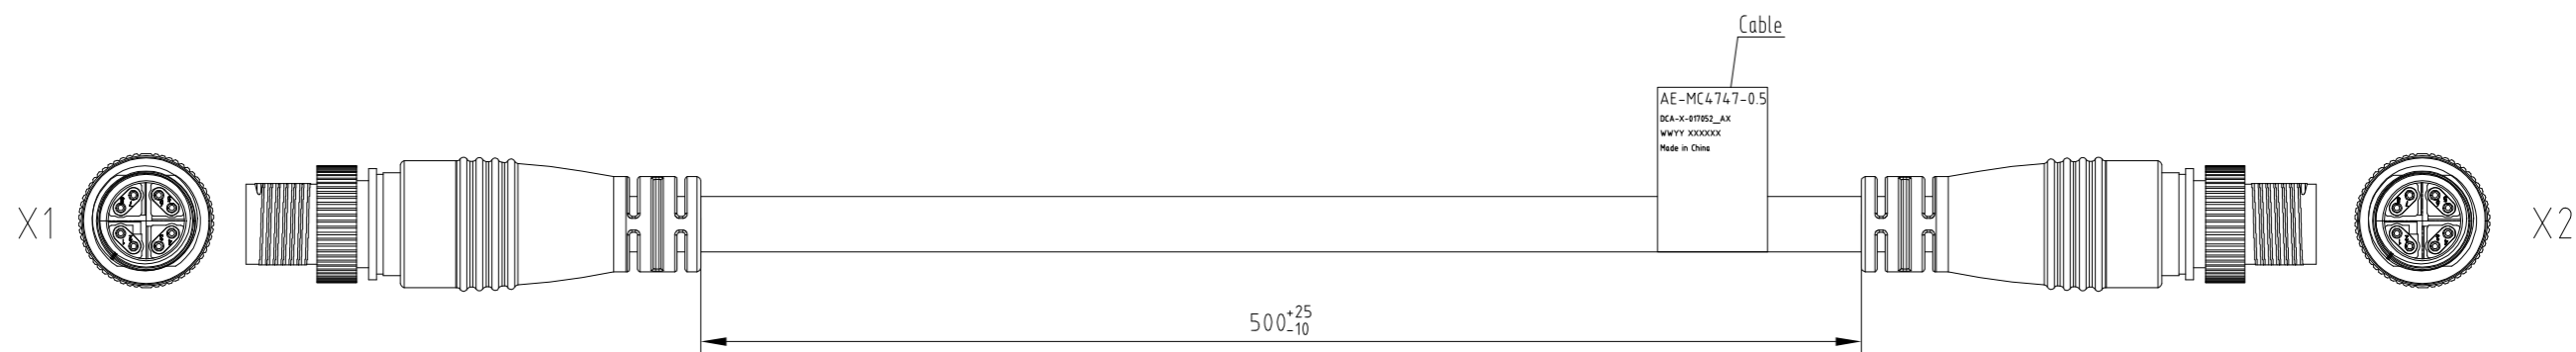


PIN ASSIGNMENT:

X1	Colour	X2	Signal
1	W/O	1	BI_D1+
2	O	2	BI_D1-
3	W/BL	3	BI_D2+
4	BL	4	BI_D2-
5	W/BR	5	BI_D3+
6	BR	6	BI_D3-
7	W/G	7	BI_D4+
8	G	8	BI_D4-
Shell	E+B	Shell	Shield



NOTES:

- All the materials must be compliant RoHS, Working temperature: -40~105°C;
- Settle for: QC/T29106-2014《Technical specification of automobile wire harness》;
- Process conforms to the IPC620 standard 3;

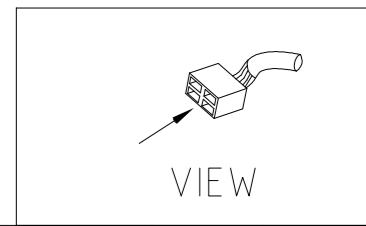

NO.	REV	DESCRIPTION	AREA	BY	DATE
<1>					
DESIGN		PART NAME: AE-MC4747-0.5 (M12X8M to M12X8M)	PART NO: 309502407	HIKVISION HANGZHOU HIKVISION DIGITAL TECHNOLOGY CO. LTD.	
APPROVED		DWG NO: DCA-X-017052	REV: A2		
STANDARD		MATERIAL:	WEIGHT:	GRADE:	FIRST ANGLE
MCODE		FINISH:	FIRST_USED_ON	SCALE: 1:1	SIZE: A3
				1:1	SHEET 1 OF 1

(Conform to the requirements of the RoHS).