

DS-C30S-02HO/4K**2-Channel 4K HDMI Output Board**

The video wall controller is mainly used for screen splicing control system, and is the core control device of the system. As a new-generation FPGA-based pure hardware image processing device, it adopts the dual data switching technology and the structure of main control board and service boards. It supports processing and transmitting large data, processing multiple high-definition and ultra-high-definition signals in real time, and managing multiple screens.

- Supports YUV 444 output and 2 channels of HDMI 2.0 ports.
- Supports HDMI composite audio output.


▪ Specification

Model		DS-C30S-02HO/4K
Chassis	Occupied Slot	Output slot
Video Output	Video Output Interface Type	HDMI 2.0
	Video Output Interfaces	2
	Video Output Resolution	4096 × 2160@60 Hz, 4096 × 2160@30 Hz, 3840 × 2160@60 Hz, 3840 × 2160@30 Hz, 2560 × 1600@60 Hz, 2560 × 1440@60 Hz, 1920 × 1200@60 Hz, 1920 × 1080@60 Hz Supports LED screen, custom resolution output, 60 Hz loading output, and 8.8 MP loading with width ranging from 288 to 7680 and height ranging from 288 to 4320.
	Max. Video Output Resolution	4K
	Loading Capacity for Video Output to LED	8.8 MP loading per port, width in the range of 288 to 7680, height in the range of 288 to 4320.
Audio Output	Audio Output Interface Type	HDMI composite audio
	Audio Output Interfaces	2

▪ Available Model

DS-C30S-02HO/4K

▪ Dimension

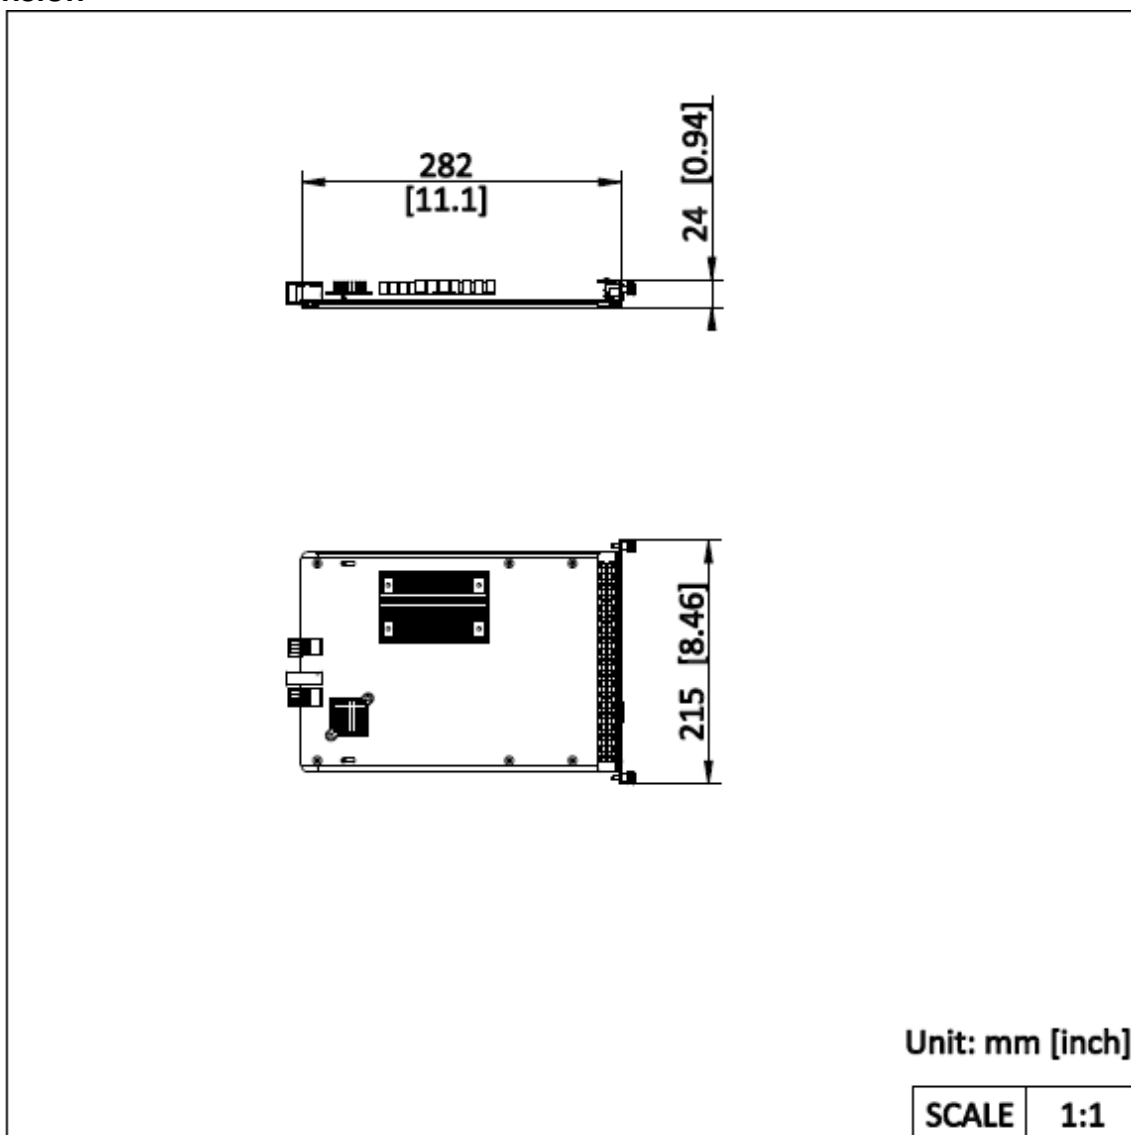

See Far, Go Further



www.hikvision.com
support@hikvision.com

