

DS-C30S-04HO**4-Channel HDMI Output Board**

The video wall controller is mainly used for screen splicing control system, and is the core control device of the system. As a new-generation FPGA-based pure hardware image processing device, it adopts the dual data switching technology and the structure of main control board and service boards. It supports processing and transmitting large data, processing multiple high-definition and ultra-high-definition signals in real time, and managing multiple screens.

- Provides 4 HDMI ports and supports YUV 444 output.
- Supports HDMI composite audio output.


▪ Specification

Model		DS-C30S-04HO
Chassis	Occupied Slot	Output slot
Video Output	Video Output Interface Type	HDMI 1.4
	Video Output Interfaces	4
	Video Output Resolution	1920 × 1200@60 Hz, 1600 × 1200@60 Hz, 1920 × 1080@60 Hz, 1680 × 1050@60 Hz, 1280 × 720@60 Hz, 1280 × 1024@60 Hz, 1024 × 768@60 Hz Supports LED screen, custom resolution output, and load-based output. The product of the length and width must be less than 2.6 MP.
	Max. Video Output Resolution	1080p
	Loading Capacity for Video Output to LED	2.6 MP loading per port, width in the range of 288 to 3840, height in the range of 288 to 2160.
Audio Output	Audio Output Interface Type	HDMI composite audio
	Audio Output Interfaces	4

▪ Available Model

DS-C30S-04HO

▪ Dimension

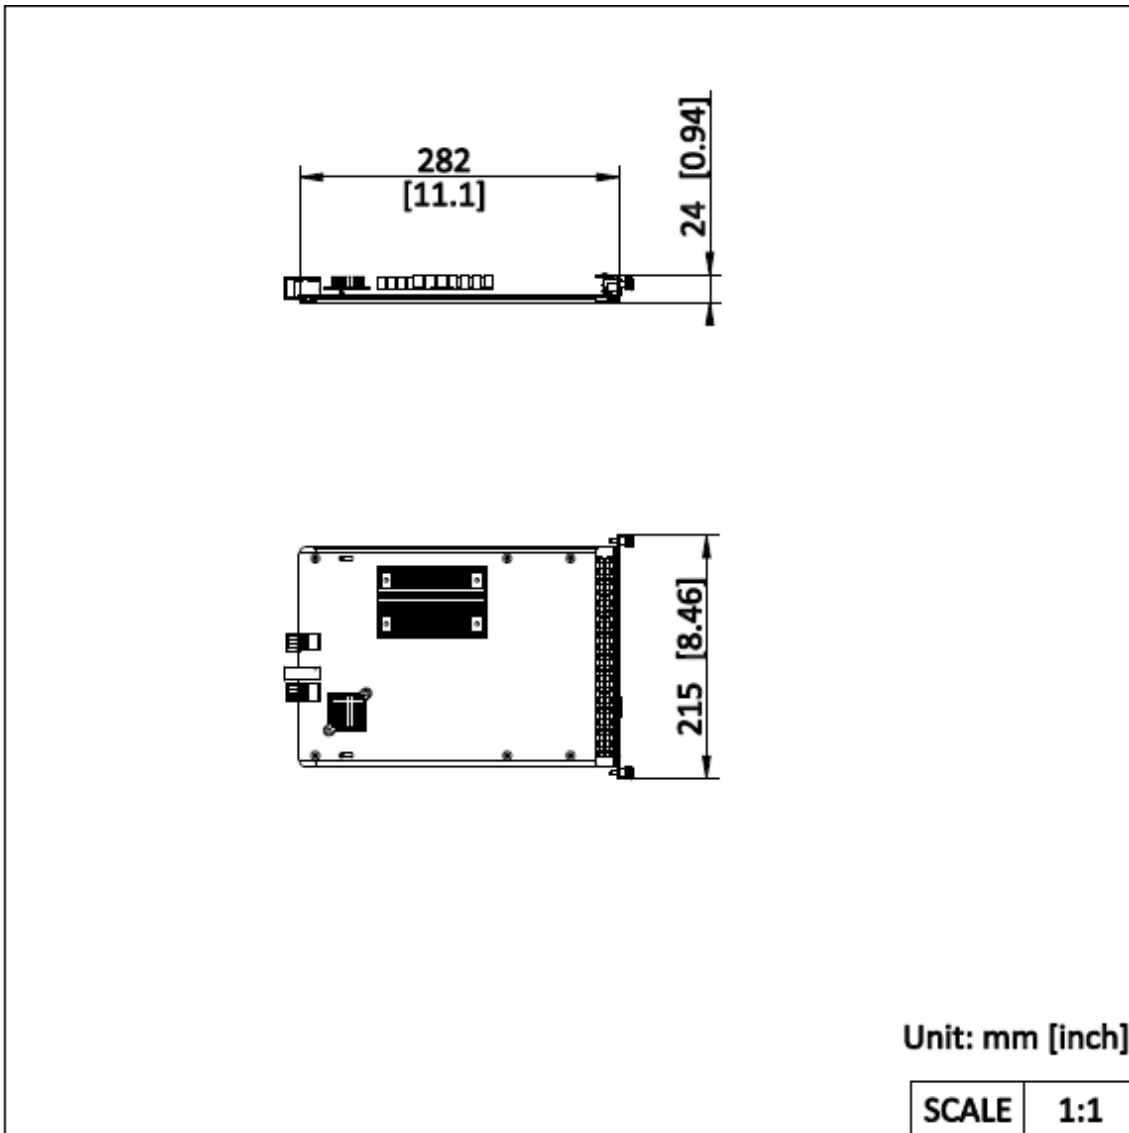

See Far, Go Further



www.hikvision.com
support@hikvision.com

