

DS-D23CP02 LCD Control Panel



The LCD Control Panel is designed for seamless integration with Hikvision LCD Display (Unit). Ideal for monitoring centers, command hubs, and exhibition venues, it enables one-touch power control, brightness adjustment, and multi-scene switching, delivering intuitive operation and enhanced visual management efficiency.

- Supports one-touch power control
- Supports adjusting brightness
- Supports switching 4 different scenes
- Proper size: 86 mm × 86 mm


▪ Specification

Working Environment	
Working Temperature	0 °C to 40 °C (32 °F to 104 °F)
Working Humidity	10% RH to 90% RH (without condensation)
Storage Temperature	-20 °C to 60 °C (-4 °F to 140 °F)
Storage Humidity	5% RH to 90% RH (without condensation)
General	
Buttons	8
Power Supply	Dry battery
Battery	No. 7 dry battery × 2
Remote Control Distance	≤ 10 m (open space with no obstacles)
Mounting Type	Placing on the flat table, or magnetic mounting
Product Dimension (W × H × D)	85.9 mm × 85.9 mm × 15 mm (3.38" × 3.38" × 0.59")
Package Dimensions (W × H × D)	232mm × 162 mm × 62 mm (9.13" × 6.38" × 2.44")
Net Weight	0.08 ± 0.01 kg (0.18 ± 0.02 lb)
Gross Weight	0.10 ± 0.01 kg (0.22 ± 0.02 lb)
Packing List	LCD Control Panel × 1, quick start guide × 1

▪ Available Model

DS-D23CP02(1 IN 1 Package)

▪ Dimension

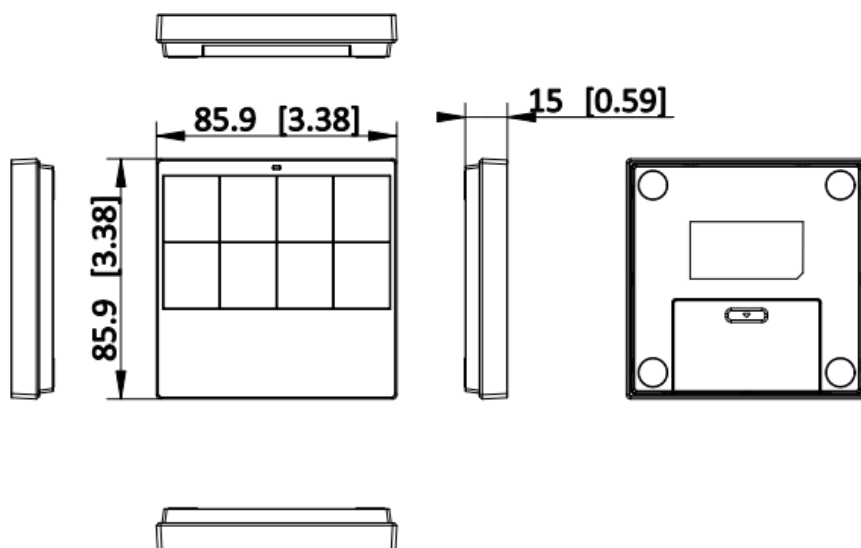

Unit: mm [inch]

SCALE	1:1
-------	-----

See Far, Go Further



www.hikvision.com
support@hikvision.com

