


**DS-D4219RI-CQF
P1.9 Rental LED****Cost-effective Rental Product**

- High precision cast aluminum cabinet, ultra-thin and lightweight, 500 × 500 ≤ 7.5 kg/cabinet, with a thickness of only 85.5mm.
- 500 mm × 500 mm/500 mm × 1000 mm cabinets can be mixed and assembled to create a variety of shapes.
- Both the 500 mm × 500 mm and 500 mm × 1000 mm cabinets use a minimalist mini control box of the same model and can be shared. Saving installation and calibrating time.
- Optional curved lock, capable of splicing large screens with ± 10 to 15° inner arc, outer arc, 90°corner, etc.
- The modular button lock design allows for fast assembly, disassembly and maintenance within 5 seconds.
- Works in silence. No fan, noise ≤ 40 DB. Not affecting the on-site audio-visual effect.
- Background large screen optimization plan. High refresh, SLR, camera 1/3000 s shutter capture, no flicker, no ghost scanning line.
- Indoor and outdoor universal pixel pitches with P1.9/2.6/2.9/3.9/4.8 etc. Specialized in providing overall LED display solutions for events, conferences, stage, product launches, and real estate.

▪ Specification

	Model	DS-D4219RI-CQF
Cabinet	Pixel Configuration	SMD Triad LED
	Pixel Pitch Category	P1.9
	Pixel Pitch	1.953 mm
	Modules Component	2 × 2
	Dimensions (W × H × D)	500 mm × 500 mm × 85.5 mm (19.69" × 19.69" × 3.37")
	Resolution	256 × 256
	Area	0.25 m ²
	Weight	7.5 kg (16.53 lb.)
	Pixel Density	262177 dots/m ²
	Lamp Board Housing	with housing
	Cabinet Material	Die-cast aluminum
	Maintenance Method	Front/Back Maintenance
	Cabinet Flatness	0.2 mm
	Protection Level	IP40(F)/IP40(R)
Display	White Balance Brightness	800 cd/m ²
	Color Temperature	3000 K to 10000 K adjustable
	Viewing Angle	Horizontal 120°, vertical 120°
	Contrast Ratio	≥ 6000 : 1
	Color Uniformity	≤ ± 0.003 Cx, Cy
	Brightness Uniformity	≥ 97%
Processing Performance	Driving Method	Constant current driving
	Frame Frequency	60 Hz
	Refresh Rate	3840 Hz
	Grey Level	14 bit
	Display Color	4.39 Trillion
Power	Power Supply	110 VAC to 220 VAC ± 15 %
	Max. Consumption	≤ 500 W/m ²
	Average Consumption	≤ 170 W/m ²
Working Environment	Working Temperature	-15 °C to 50 °C (5 °F to 122 °F)
	Working Humidity	10 % to 90 % RH (non-condensing)
	Storage Humidity	10 % to 90 % RH (non-condensing)
	Storage Temperature	-40 °C to 80 °C (-40 °F to 176 °F)
General	Gross Weight	90 kg (198.42 lb.) (8pcs/Case)
	Package Dimension (W × H × D)	975 mm x 580 mm x 746 mm (38.39" × 22.83" × 29.37")
	Lifespan	Lamp 100,000 hours


Typical Application

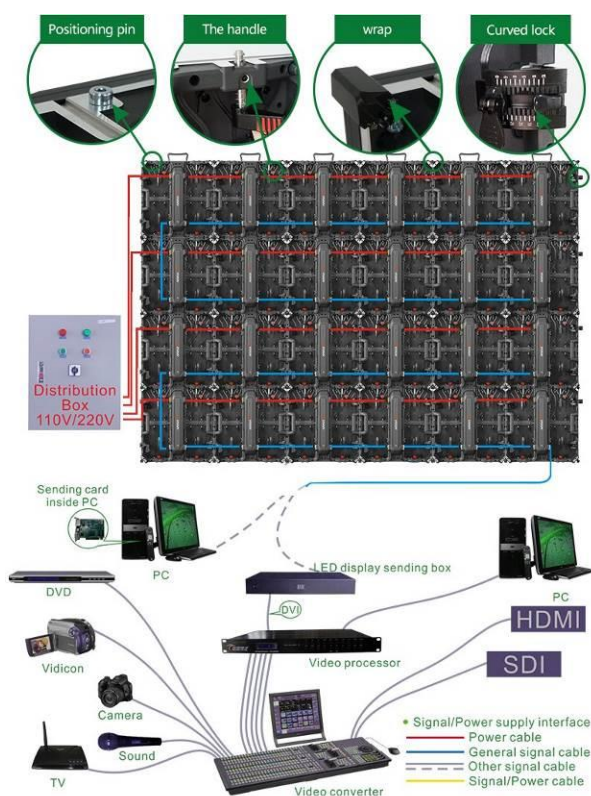

Available Model

DS-D4219RI-CQF

Dimension

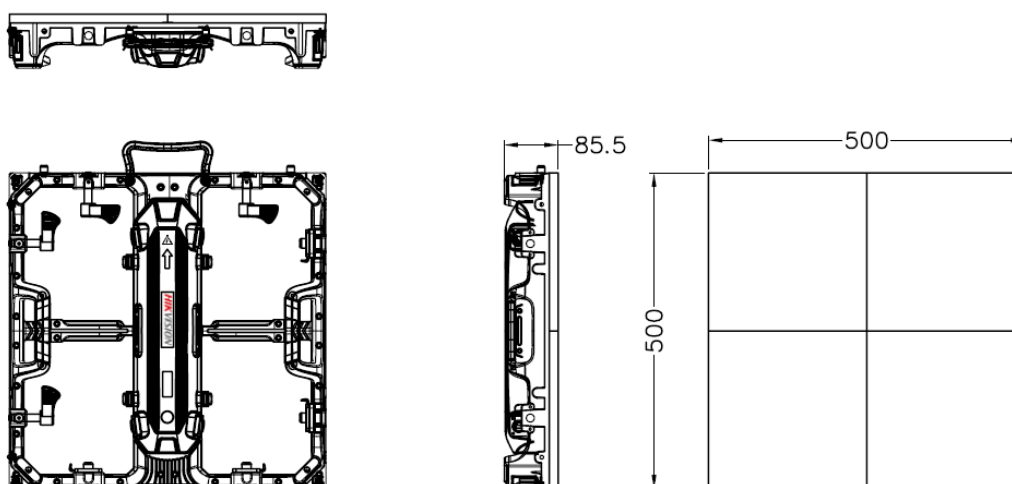

Unit: mm

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com

Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq

