

**DS-D4239RO-CQ
P3.9 Rental LED****Cost-effective Rental Product**


- High precision cast aluminum cabinet, ultra-thin and light weight, $500 \times 500 \leq 7.5$ KG/cabinet, with a thickness of only 87.5 mm;
- $500 \text{ mm} \times 500 \text{ mm}$ / $500 \text{ mm} \times 1000 \text{ mm}$ cabinets can be mixed and assembled to create a variety of shapes;
- Both the $500 \text{ mm} \times 500 \text{ mm}$ and $500 \text{ mm} \times 1000 \text{ mm}$ cabinets use a minimalist mini control box of the same model and can be shared, saving installation and calibrating time;
- Optional curved lock, capable of splicing large screens with $\pm 10^\circ$ to 15° inner arc, outer arc, 90° corner, etc;
- The modular button lock design allows for fast assembly, disassembly and maintenance within 5 seconds;
- Work in silence: no fan, noise ≤ 40 DB; Not affecting the on-site audio-visual effect;
- Background large screen optimization plan; High refresh, SLR, camera 1/3000 S shutter capture, no flicker, no ghost scanning line;
- Indoor and outdoor universal pixel pitches with P1.9/2.6/2.9/3.9/4.8 etc; Specialized in providing overall LED display solutions for events such as conferences, stage, product launches, and real estate.

• Specification

Model		DS-D4239RO-CQ
Cabinet	Pixel Configuration	SMD Triad LED
	Pixel Pitch Category	P3.91
	Pixel Pitch	3.91 mm
	Modules Component	2 × 2
	Dimensions (W × H × D)	500 mm × 500mm × 87.5 mm (19.69" × 19.69" × 3.44")
	Resolution	128 × 128
	Area	0.25 m ²
	Weight	8 Kg (17.64lb)
	Pixel Density	65536 dots/m ²
	Lamp Board Housing	with housing
	Cabinet Material	Die-cast aluminum
	Maintenance Method	Back Maintenance
	Cabinet Flatness	0.2 mm
	Protection Level	IP65(F)/IP65(R)
Display	White Balance Brightness	5000 cd/m ²
	Color Temperature	3000 K to 10000 K adjustable
	Viewing Angle	Horizontal 120°, vertical 120°
	Contrast Ratio	≥ 7000:1
	Color Uniformity	≤ ± 0.003Cx, Cy
	Brightness Uniformity	≥ 97%
Processing Performance	Driving Method	Constant current driving
	Frame Frequency	60 Hz
	Refresh Rate	3840 Hz
	Grey Level	14 bit
	Display Color	4.39 Trillion
Power	Power Supply	AC 110 V to 220 V ± 15%
	Max. Consumption	≤ 750 W/m ²

	Average Consumption	≤ 240 W/m ²
Working Environment	Working Temperature	-15 °C to +50 °C (5 °F to +122 °F)
	Working Humidity	10% to 90% RH (non-condensing)
	Storage Humidity	10% to 90% RH (non-condensing)
	Storage Temperature	-40 °C to +80 °C (-40 °F to +176 °F)
General	Gross Weight	95 Kg (209.44 lb) (8pcs /Case)
	Package Dimension (W × H × D)	975 mm × 580 mm × 746 mm (38.39" × 22.83" × 29.37")
	Lifespan	Lamp 100,000 hours



▪ Typical Application

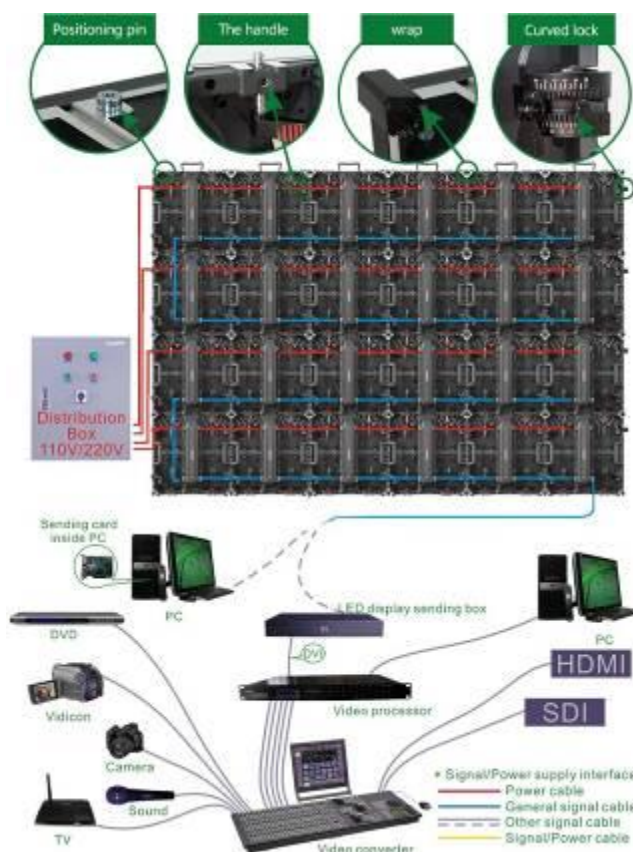

▪ Available Model

DS-D4239RO-CQ

▪ Dimension

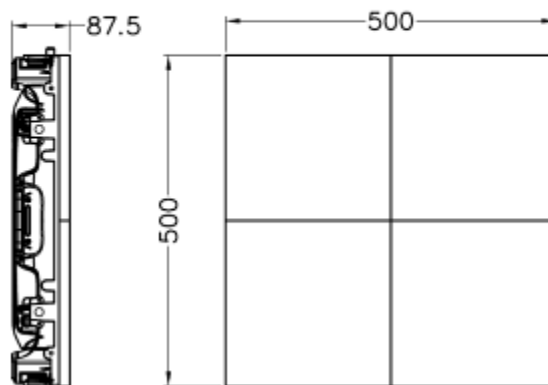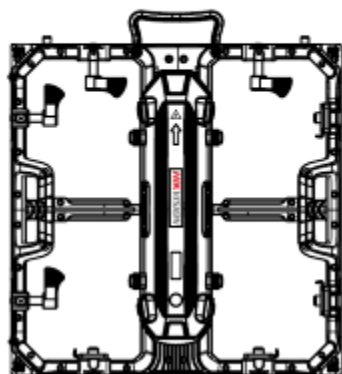

Unit: mm

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com

Follow us on social media to get the latest product and solution information.

