

**DS-D4266GO-2AAA**  
**P6.6 Outdoor LED Display Unit**



- Adopt energy-saving scheme, RGB LED IC power supply accurate distribution, energy consumption reduced by 40%+
- Well-designed heat dissipation scheme to cope with hot weather without air conditioner
- Use aviation plug to transmit power and signal between the cabinet, with excellent sun protection and corrosion resistance
- The aluminum cabinet features high flatness of splicing and weighs only 28 kg.
- Meet CE/CB and other international certification standards, stable and reliable quality

## ▪ Specification

<b>Display</b>	
White Balance Brightness	9000 nit (Factory preset brightness) 10000 nit (Peak)
Color Temperature	9300K adjustable
Viewing Angle	Horizontal 160°, vertical 130°
Contrast Ratio	≥ 8000:1
Color Uniformity	≤ ± 0.003Cx , Cy
Brightness Uniformity	≥ 97%
<b>Module</b>	
Pixel Configuration	SMD Triad LED
Pixel Pitch Category	P6.6
Pixel Pitch	6.67 mm
Lamp Bead Dimensions	2727
Dimensions (W × H × D)	960 mm × 960 mm × 100 mm (37.795" × 37.795" × 3.973")
Area	0.9216 m <sup>2</sup>
Weight	27.5 Kg
Pixel Density	22500 dots/m <sup>2</sup>
Maintenance Method	Front/Rear maintenance
Waterproof Level	IP66
Component Material	Aluminum Profile
<b>Cabinet</b>	
Modules Component	3 × 2
Resolution	144 × 144
<b>Processing Performance</b>	
Driving Method	Constant current driving
Frame Frequency	50/60 Hz
Refresh Rate	Up to 3840 Hz
Grey Level	14~16 bit adjustable
<b>Key Material</b>	
Lamp Encapsulation	2727(gold wire)
Control System	Hikvision
<b>Power</b>	
Power Supply	110~220 VAC ± 15%
Max. Consumption	≤509 W/m <sup>2</sup> ( 9000nits )
Average Consumption	≤169 W/m <sup>2</sup> ( 9000nits )
<b>Working Environment</b>	
Working Temperature	-40 °C to 60 °C (-4 °F to 140 °F )
Working Humidity	10%~95%RH (No condensation)
Storage Humidity	10%~95%RH (No condensation)
Storage Temperature	-40 °C to 70 °C (-40 °F to 158 °F )
<b>General</b>	
Gross Weight	32.05 kg /1 in 1
Package Dimension (W × H × D)	1140 (W) mm × 244 (H) mm × 1068 (D) mm


Lifespan	Lamp 100,000 hours
----------	--------------------

▪ **Available Model**

DS-D4266GO-2AAA 960\*960 Aluminum(STOCK)

DS-D4266GO-2AAA 960\*960 Aluminum(Afr-S)

▪ **Dimension**

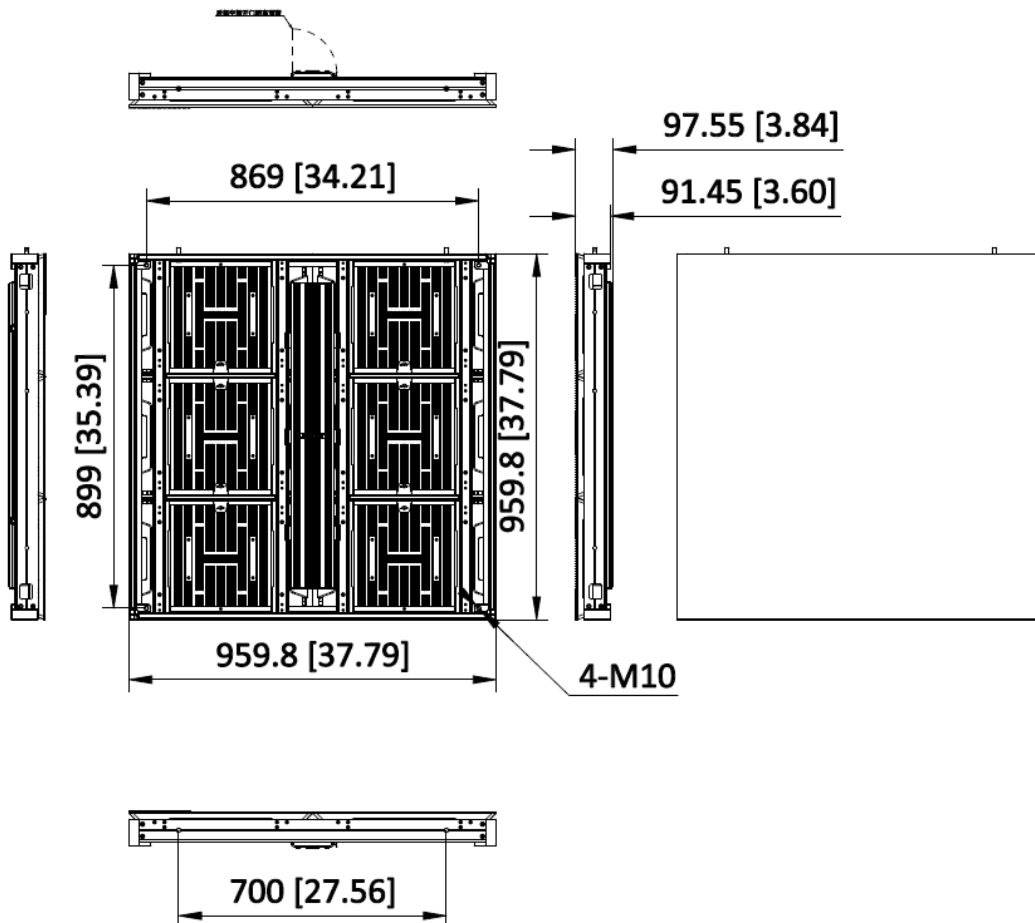

Unit: mm [inch]

SCALE	1:3
-------	-----

▪ **Accessory**

▪ **Included**

DS-D42CO-1APA/ HS	VAT-UP400D-3.2/ 4.2
	

▪ **Optional**

DS-D42-PC(5 PCS)	DS-D42CO-1/T(10 PCS)	DS-D4266GO-2AAA /M	DS-D42CD-1AAB/R	DS-D42-NC
				
DS-D42-PC/NC				
				

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

