

**DS-D4729CD-1A/M**  
**250x250/aries rental outdoor spare module P2.9**



- 5% Spare module package for 5 sqm outdoor (compatible with DS-D4729CD-1A, DS-D4729CD-1AC, DS-D4729CF-1A, DS-D4729CF-1AC) with accessories accounting: outdoor P2.9 modules x 4, maintenance LED beads x300, ICs x20, mask x 16, etc.


## ▪ Specification

Product Type	
Product Type	Spare Modules Package
Display	
White Balance Brightness	4500 cd/m <sup>2</sup>
Color Temperature	6500K adjustable
Viewing Angle	Horizontal 160°, vertical 140°
Contrast Ratio	≥ 6000:1
Color Uniformity	≤ ± 0.004Cx , Cy
Brightness Uniformity	≥ 97%
Cabinet	
Pixel Configuration	SMD Triad LED
Pixel Pitch Category	P2.9
Pixel Pitch	2.9762 mm
Pixel Density	112896 dots/m <sup>2</sup>
Lamp Board Housing	With housing
Maintenance Method	Rear maintenance
Key Material	
Lamp Encapsulation	SMD2020
Control System	Hikvision
Processing Performance	
Driving Method	Constant current driving
Frame Frequency	50/60 Hz
Refresh Rate	7680 Hz
Grey Level	14 bit
Working Environment	
Working Temperature	-20 °C to +45 °C (-4 °F to +113 °F )
Working Humidity	10% ~ 90%RH (No condensation)
Storage Humidity	10% ~ 90%RH (No condensation)
Storage Temperature	-40 °C to +60 °C (-40 °F to +140 °F )

## ▪ Available Model

DS-D4729CD-1A/M 250\*250/OUTDOOR MODULE

## ▪ Dimension

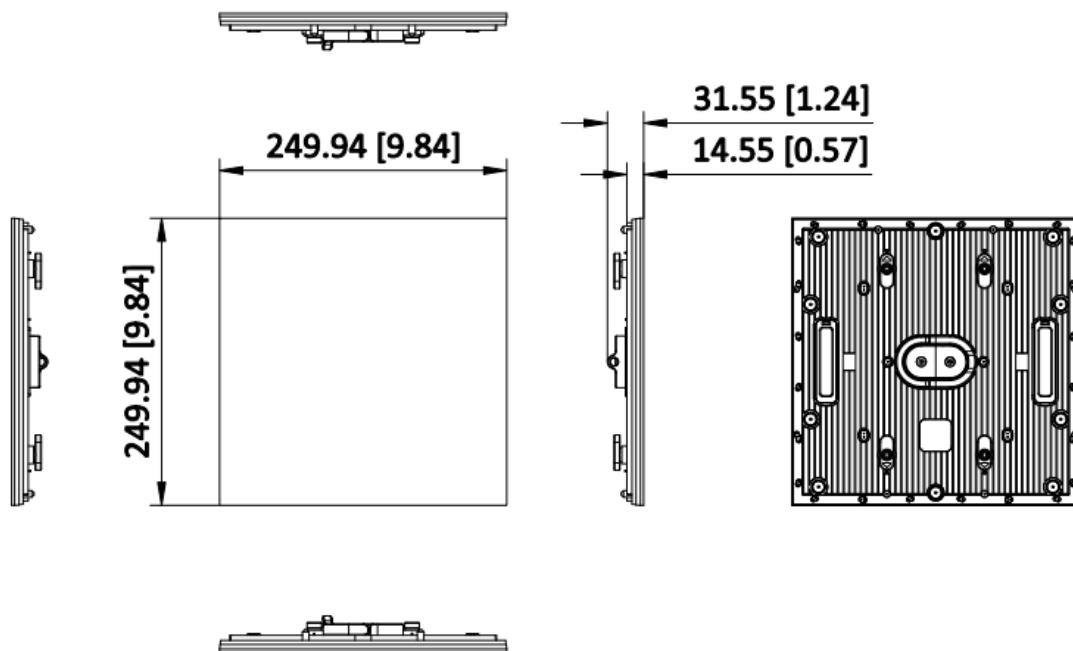

Unit: mm [inch]

SCALE	1:1
-------	-----

▪ **Accessory**



DS-D4729CD-1AC



DS-D4729CD-1A



DS-D4729CF-1A



DS-D4729CF-1AC

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

