

DS-D4739CD-1A/M
250x250/aries rental outdoor spare module P3.9



- 5% Spare module package for 5 sqm outdoor (compatible with DS-D4739CD-1A, DS-D4739CD-1AC, DS-D4739CF-1A, DS-D4739CF-1AC) with accessories accounting: outdoor P3.9 modules x 4, maintenance LED beads x300, ICs x20, mask x 16, etc.

▪ Specification


Product Type	
Product Type	Spare Modules Package
Display	
White Balance Brightness	4500 cd/m ²
Color Temperature	6500K adjustable
Viewing Angle	Horizontal 160°, vertical 140°
Contrast Ratio	≥ 6000:1
Color Uniformity	≤ ± 0.004Cx , Cy
Brightness Uniformity	≥ 97%
Cabinet	
Pixel Configuration	SMD Triad LED
Pixel Pitch Category	P3.9
Pixel Pitch	3.9063 mm
Resolution	128 × 128
Pixel Density	65536 dots/m ²
Lamp Board Housing	With housing
Maintenance Method	Rear maintenance
Key Material	
Lamp Encapsulation	SMD2020
Control System	Hikvision
Processing Performance	
Driving Method	Constant current driving
Frame Frequency	50/60 Hz
Refresh Rate	7680 Hz
Grey Level	14 bit
Power	
Power Supply	110~220 VAC ± 15%
Working Environment	
Working Temperature	-20 °C to +45 °C (-4 °F to +113 °F)
Working Humidity	10% ~ 90%RH (No condensation)
Storage Humidity	10% ~ 90%RH (No condensation)
Storage Temperature	-40 °C to +60 °C (-40 °F to +140 °F)

▪ Available Model

DS-D4739CD-1A/M 250*250/OUTDOOR MODULE

DS-D4739CD-1A/M 250*250/OUTDOOR/NOVA

▪ Dimension

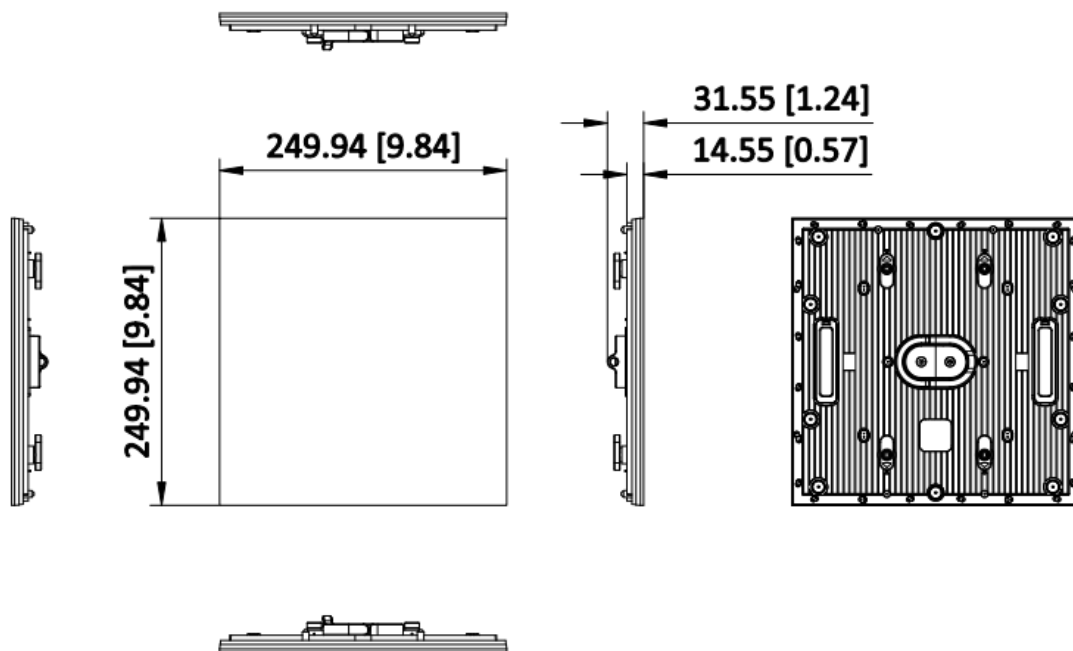

Unit: mm [inch]

SCALE	1:1
-------	-----

▪ Accessory



DS-D4739CF-1AC



DS-D4739CD-1A



DS-D4739CD-1AC



DS-D4739CF-1A

See Far, Go Further



www.hikvision.com
support@hikvision.com

