

DS-K1T804AF
Fingerprint Access Control Terminal

- Integrated management of access control and the time and attendance functions
- 3,000 fingerprints and 100,000 events storage
- Built-in card reader for M1 card
- Communication via TCP/TP and Wi-Fi
- RS-485, wiegand interface
- Alarm input and output interface
- ISUP5.0, ISAPI


▪ Specification

Display	
Screen size	2.4-inch
Resolution	320 × 240
Type	LCD-TFT display screen
Audio	
Audio output	1 loudspeaker, 1 buzzer
Network	
Wired network	TCP/IP, 10/100Mbps, self-adaptive
Wi-Fi	Support
Interface	
Network interface	1
RS-485	1
Wiegand	1
Lock control	1
Exit button	1
Door contact input	1
Alarm input	1
Alarm output	1
TAMPER	1
USB	1
Capacity	
Fingerprint capacity	3000
Event capacity	100,000
Authentication	
Fingerprint module	Optical fingerprint module
Fingerprint comparing mode	1:1 and 1:N
Fingerprint recognition duration	< 1 s
General	
Indicator	Power/status (red/green)
Power supply	12 VDC/1 A
Working temperature	-10 °C to +55 °C (14 °F to +131 °F)
Working humidity	10% to 90% (no condensing)
Color	Black (included), gold (optional), silver (optional), white (optional)
Dimensions	205 mm × 76.5 mm × 37 mm (8.07" × 3.01" × 1.46")
Installation	Surface mounting
Language	English, Vietnamese, Brazilian Portuguese, Spanish, French, Italian, Arabic, Thai, Turkish, Indonesian, and Ukrainian

▪ Available Model

DS-K1T804AF

▪ Dimension

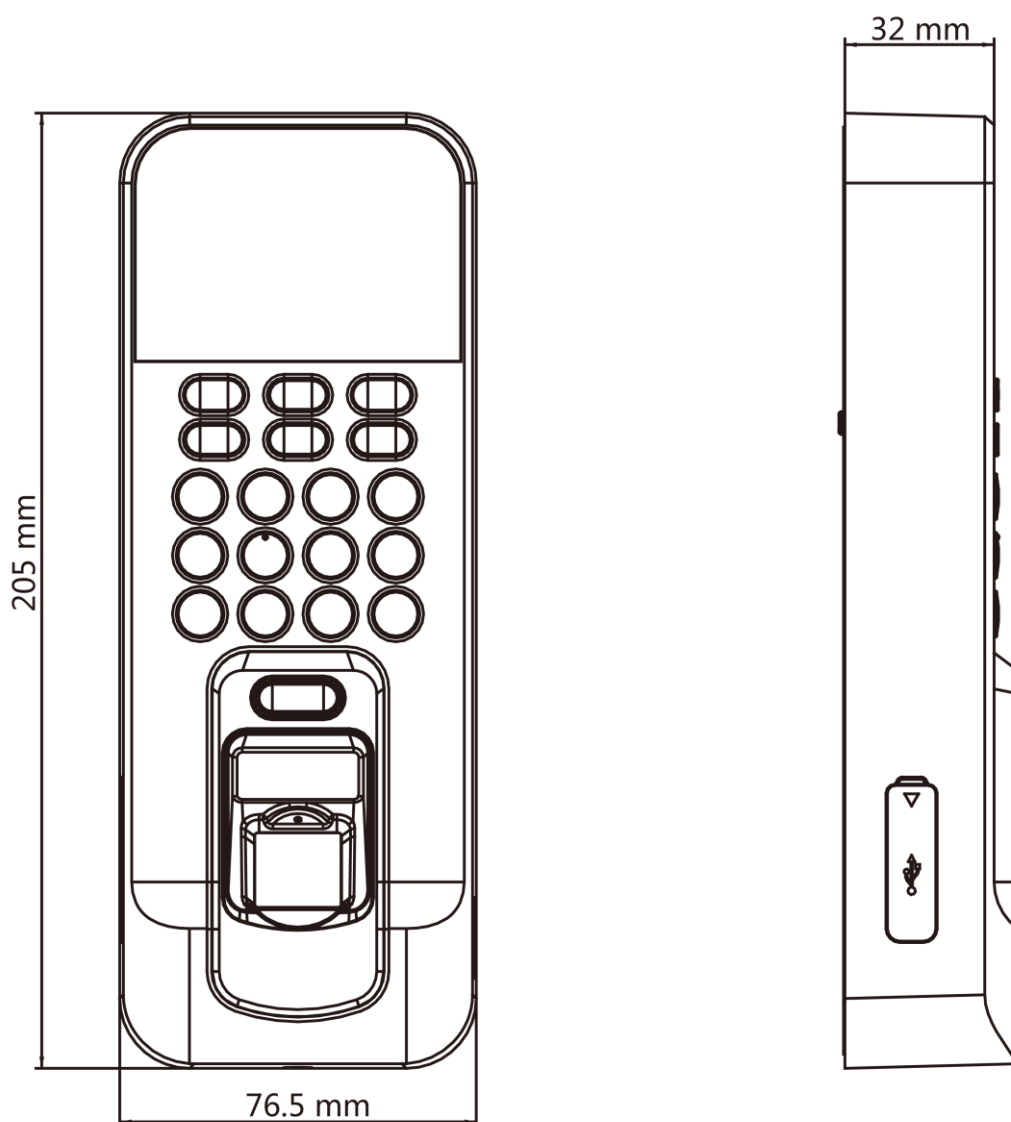

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

