

DS-K3M210
Access Board

Access board for Speed gates & Turnstiles

- Support web server function, manage and configure functions through browser.
- Accessible to QR code readers and card readers.
- Support fire access, linkage emergency door opening.

▪ Specification


System	
Operating system	Linux system
Network	
Communication protocol	ISAPI, ISUP5.0
Wired network	100 Mbps self-adaptive Ethernet
Wi-Fi	optional
Interface	
Network interface	1
Lock control	2
Exit button	2
Alarm output	2
RS-485	4
RS-232	3
Wiegand	N/A
USB	1
Fire alarm input	1
Case input	2
Function	
Configuration via Web browser	Support
Configuration via mobile Web browser	Support
Anti-passback	Support
First person in	Support
Time synchronization	Support
General	
Power	24 VDC 1 A
Power consumption	20 W
Working temperature	-40 °C to 70 °C (-40 °F to 158 °F)
Working humidity	10% to 95% (No Condensing)
Dimensions	Without casing: 150 mm x 92 mm x 16.6 mm (5.9" x 3.62" x 0.65")
Weight	0.2 Kg (0.41 lb)
Approval	CE/CB/RoHS/REACH/WEEE
Language	English, Japanese, Thai, Bahasa Indonesia, Russian, Spanish (Europe), Spanish (Latina)
Configuration	
Module selection	No

▪ Available Model

DS-K3M210/G411X

DS-K3M210/G501X

▪ Dimension

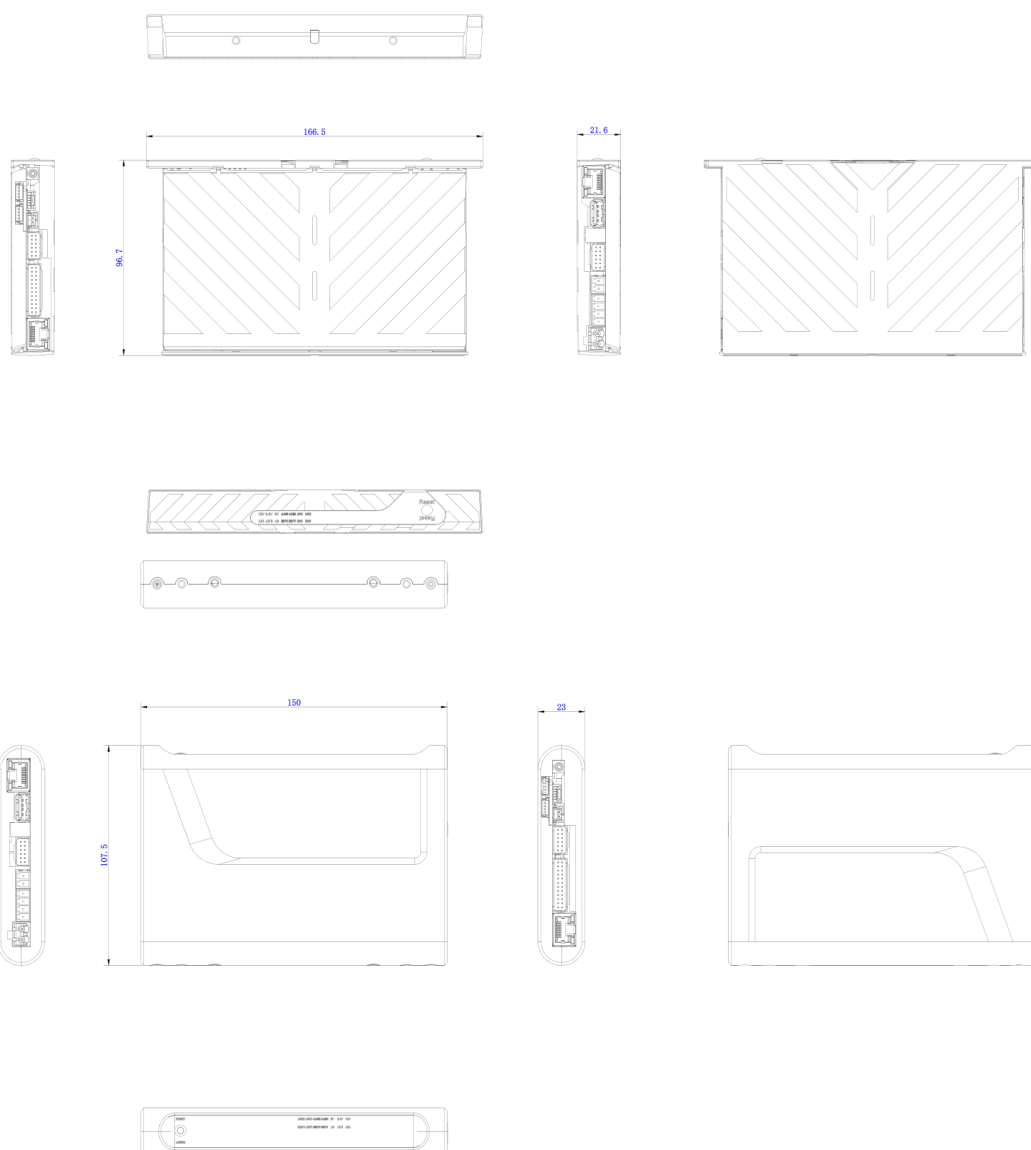


▪ Accessory



DS-K3B220LX



DS-K3G501LX



DS-K3B411BLX



DS-K3BC430LX



DS-K3B530LX



DS-K3G200LX



DS-K3G411LX



DS-K7CR01

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

