

## DS-QAZ1MP10G1 Network Paging Station



- Linux system, 10.1-inch color IPS touch screen
- Support live/schedule/emergency broadcasting, TTS, 2-way audio, alarm linkage
- Support partition management
- Support managing up to 50 terminals
- Support wired network access and standard PoE power supply

## ▪ Specification


Microphone	
Type	electret
Frequency Response	50 Hz to 16 kHz
Sensitivity	-42 dB±2 dB (0db=1V/Pa at 1KHz)
Impedance	Output Impedance: 680 Ω (at 1KHz)
Speaker	
Speaker Type	<p>1. Built-in Speaker:            Rated Impedance: 8 Ω            Rated Power: 1 W            Resonant Frequency: 950 Hz            Sensitivity: 93 dB (Test Condition: 0.1 m @1 W)</p> <p>2. Earpiece:            Rated Impedance: 6 Ω            Rated Power: 0.1 W            Resonant Frequency: 650 Hz            Sensitivity: 94 dB (Test Condition: 0.1 m @1 W)</p> <p>3. External Speaker            Rated Impedance: 8 Ω            Rated Power: 2 W            Resonant Frequency: 650 Hz            Sensitivity: 100 dB (Test Condition: 0.1 m @1 W)</p>
Function	
Audio Bit Rate	Broadcast : MP3 128Kbps Two-Way Audio : G711 64kbps
Audio File Format	Format: MP3, WAV Bit Width: 16bit Maximum Single File Size: 100 MB
Echo Cancellation	Support
Memory Size	32 GB
Flash Size	32 GB
Network	
Network Protocol	ISAPI, SNTP
Interface	
Alarm	2 alarm inputs 2 alarm outputs
Network Interface	1 RJ45 10 M/100 M/1000 M adaptive Ethernet port 1 POE ( IEEE 802.3AT class 4 )
Local Storage	EMMC
RS-485	1

Display Screen	Type: IPS Size: 10.1 inches Resolution: 1280 × 800 Touch: Support
<b>General</b>	
Power	12 VDC, Standard POE (IEEE 802.3AT class 4), 18 W
Operating Condition	-10 °C to +50 °C(14 °F to 122 °F), humidity 10% to 90%
Dimension	246 mm × 166 mm × 32 mm (9.69" × 6.54" × 1.26") (L × W × H)
Package Dimension	474 mm × 345 mm × 85 mm (18.66" × 13.58" × 3.35") (L × W × H)
Weight	1.28 kg (2.82 lb.)
With Package Weight	2.53 kg (5.58 lb.)

▪ **Available Model**

DS-QAZ1MP10G1

▪ **Dimension**

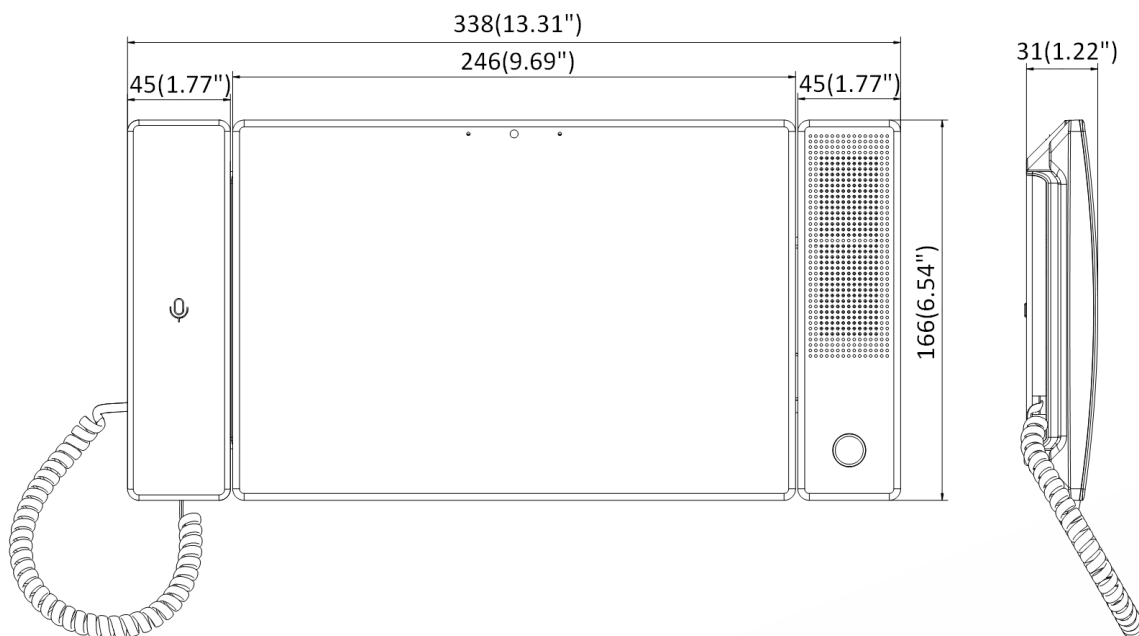

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

