



Body Camera
Quick Start Guide

About this Document

- This Document includes instructions for using and managing the Product. Pictures, charts, images and all other information hereinafter are for description and explanation only.
- The information contained in the Document is subject to change, without notice, due to firmware updates or other reasons. Please find the latest version of the Document at the Hikvision website (<https://www.hikvision.com>). Unless otherwise agreed, Hangzhou Hikvision Digital Technology Co., Ltd. or its affiliates (hereinafter referred to as "Hikvision") makes no warranties, express or implied.
- Please use the Document with the guidance and assistance of professionals trained in supporting the Product.

About this Product

This product can only enjoy the after-sales service support in the country or region where the purchase is made.

Acknowledgment of Intellectual Property Rights

- Hikvision owns the copyrights and/or patents related to the technology embodied in the Products described in this Document, which may include licenses obtained from third parties.
- Any part of the Document, including text, pictures, graphics, etc., belongs to Hikvision. No part of this Document may be excerpted, copied, translated, or modified in whole or in part by any means without written permission.
- **HIKVISION** and other Hikvision's trademarks and logos are the properties of Hikvision in various jurisdictions.
- Other trademarks and logos mentioned are the properties of their respective owners.

LEGAL DISCLAIMER

- TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, THIS DOCUMENT AND THE PRODUCT DESCRIBED, WITH ITS HARDWARE, SOFTWARE AND FIRMWARE, ARE PROVIDED "AS IS" AND "WITH ALL FAULTS AND ERRORS". HIKVISION MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION, MERCHANTABILITY, SATISFACTORY QUALITY, OR FITNESS FOR A PARTICULAR PURPOSE. THE USE OF THE PRODUCT BY YOU IS AT YOUR OWN RISK. IN NO EVENT WILL HIKVISION BE LIABLE TO YOU FOR ANY SPECIAL, CONSEQUENTIAL, INCIDENTAL, OR INDIRECT DAMAGES, INCLUDING, AMONG OTHERS, DAMAGES FOR LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION, OR LOSS OF DATA, CORRUPTION OF SYSTEMS, OR LOSS OF DOCUMENTATION, WHETHER BASED ON BREACH OF CONTRACT, TORT (INCLUDING NEGLIGENCE), PRODUCT LIABILITY, OR OTHERWISE, IN CONNECTION WITH THE USE OF THE PRODUCT, EVEN IF HIKVISION HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES OR LOSS.
- YOU ACKNOWLEDGE THAT THE NATURE OF THE INTERNET PROVIDES FOR INHERENT SECURITY

RISKS, AND HIKVISION SHALL NOT TAKE ANY RESPONSIBILITIES FOR ABNORMAL OPERATION, PRIVACY LEAKAGE OR OTHER DAMAGES RESULTING FROM CYBER-ATTACK, HACKER ATTACK, VIRUS INFECTION, OR OTHER INTERNET SECURITY RISKS; HOWEVER, HIKVISION WILL PROVIDE TIMELY TECHNICAL SUPPORT IF REQUIRED.

- YOU AGREE TO USE THIS PRODUCT IN COMPLIANCE WITH ALL APPLICABLE LAWS, AND YOU ARE SOLELY RESPONSIBLE FOR ENSURING THAT YOUR USE CONFORMS TO THE APPLICABLE LAW. ESPECIALLY, YOU ARE RESPONSIBLE, FOR USING THIS PRODUCT IN A MANNER THAT DOES NOT INFRINGE ON THE RIGHTS OF THIRD PARTIES, INCLUDING WITHOUT LIMITATION, RIGHTS OF PUBLICITY, INTELLECTUAL PROPERTY RIGHTS, OR DATA PROTECTION AND OTHER PRIVACY RIGHTS. YOU SHALL NOT USE THIS PRODUCT FOR ANY PROHIBITED END-USES, INCLUDING THE DEVELOPMENT OR PRODUCTION OF WEAPONS OF MASS DESTRUCTION, THE DEVELOPMENT OR PRODUCTION OF CHEMICAL OR BIOLOGICAL WEAPONS, ANY ACTIVITIES IN THE CONTEXT RELATED TO ANY NUCLEAR EXPLOSIVE OR UNSAFE NUCLEAR FUEL-CYCLE, OR IN SUPPORT OF HUMAN RIGHTS ABUSES.
- IN THE EVENT OF ANY CONFLICTS BETWEEN THIS DOCUMENT AND THE APPLICABLE LAW, THE LATTER PREVAILS.

© Hangzhou Hikvision Digital Technology Co., Ltd. All rights reserved.

Symbol Conventions

The symbols that may be found in this document are defined as follows.

Symbol	Description
 NOTE	Provides additional information to emphasize or supplement important points of the main text.
 WARNING	Indicates a potentially hazardous situation, which if not avoided, could result in equipment damage, data loss, performance degradation, or unexpected results.
 DANGER	Indicates a hazard with a high level of risk, which if not avoided, will result in death or serious injury.

TABLE OF CONTENTS

Chapter 1 Introduction.....	4
1.1 Package List	4
1.2 Buttons and Interfaces	4
Chapter 2 Installation.....	6
2.1 Install Shoulder Clip	6
2.2 Uninstall Shoulder Clip	7
2.3 Install Battery	7
2.4 Install MicroSIM Card	8
2.5 Charge Body Camera	10
Chapter 3 Detailed Configuration	11

Chapter 1 Introduction

Body camera, a video recording system, is typically used by law enforcement officers to record their interactions with the public and gather video evidences at crime scenes.

1.1 Package List

Following objects are included in package. If something loses, contact us or our supplier for it.

- 1 × Body camera
- 1 × USB data cable
- 1 × Charger
- 1 × Battery
- 1 × Demountable and angle adjustable clip
- 1 × Regulatory Compliance and Safety Information

1.2 Buttons and Interfaces

Refer to Figure 1-1 for the overall view of the body camera.

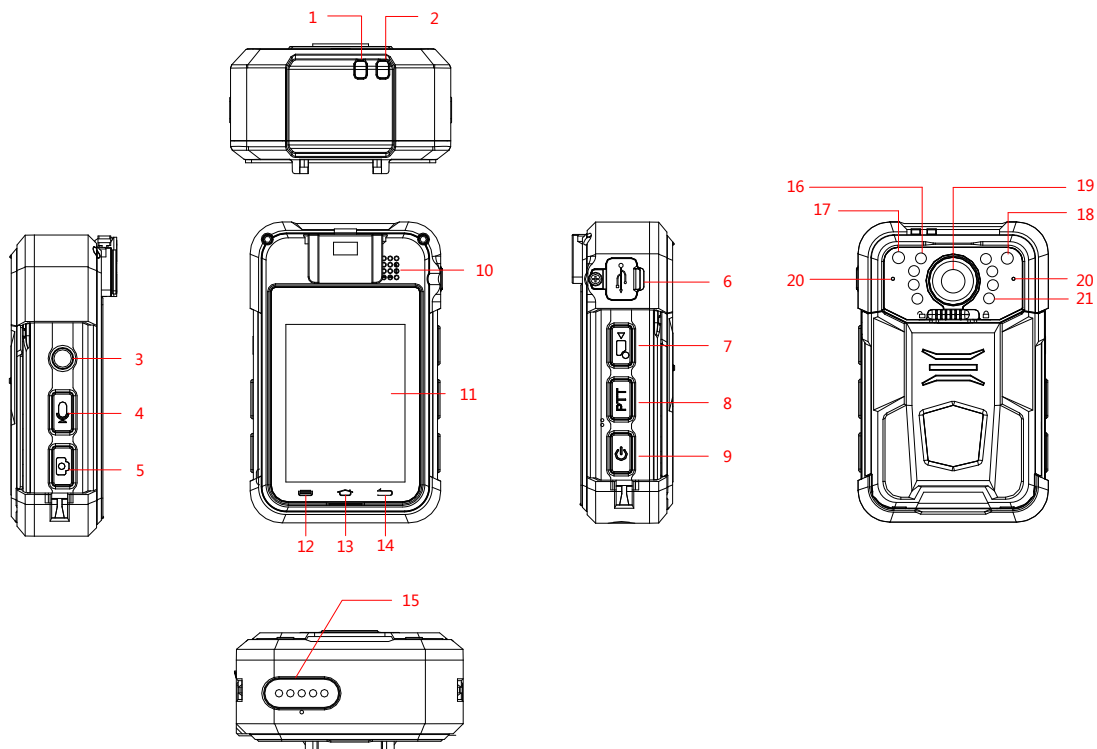


Figure 1-1 Overview

Table 1-1 Description of Overview

No.	Button	Description
1	LED 1	● When body camera is being charged, it is solid red. ● When body camera is fully charged, it is solid green. ● When body camera is in low battery, it flashes in red with high frequency. ● When body camera is recording, it flashes in red with low frequency.
2	LED 2	● When body camera is working, it is solid green. ● When body camera is recording audio, it flashes in yellow.
3	SOS	In emergency, hold it for more than 1 second to alarm manually and send the alarm to the platform.
4	Audio recording	● Press it to start/stop recording audio. ● Hold it for 3 seconds to tag the video or audio file. Hold it again to cancel tag.
5	Capture	Press it to capture current live view image.
6	USB interface	Connect USB cable for charging or data transmission.
7	Recording	● Press it to start/stop recording. ● Hold it for 3 seconds to turn on laser positioning light. ● When body camera is shut down, hold it for 3 seconds to start up it and start recording.
8	PTT	Hold it and the body camera can work as a MIC or loudspeaker for two-way audio.
9	On/Off	● When body camera is off, hold it for 3 seconds to start it up. ● When body camera is on, hold it for 3 seconds to shut it down. ● After body camera is started up, press it to inactivate/activate LCD.
10	Loudspeaker	Loudspeaker.
11	LCD	It displays local menu and live view image.
12		On some pages, tap it and the shortcut menu will pop up.
13		Tap it to switch to camera. Hold it to list the software process.
14		Tap it to return to the upper menu.
15	Expansion interface	Connect it to the cradle for charging or data transmission.

No.	Button	Description
		 NOTE The cradle is optional.
16	White light	It supplies light at dark environment.
17	Photosensitive sensor	It can detect the surrounding light and adjust the LCD brightness to save power and make your eyes comfortable.
18	Laser positioning light	You can turn on the laser positioning light to judge the position when recording or capturing.
19	Lens	Lens.
20	MIC	MIC.
21	IR Light	You can turn on the IR light to supply body camera sufficient light to get a visible image.

Chapter 2 Installation

2.1 Install Shoulder Clip

The shoulder clip helps you to fix the body camera on your garment. The vertical adjustable angle is 360°.

Step 1 Insert the shoulder clip down into the slot on the front panel of the body camera.

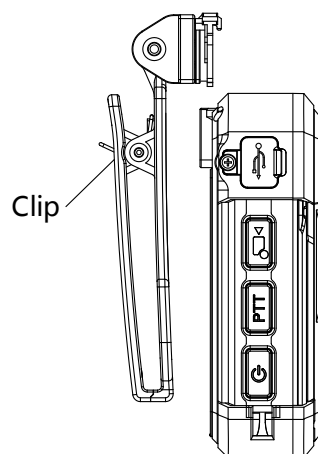


Figure 2-1 Install Shoulder Clip

Step 2 Check if the clip is inserted into the slot firmly.

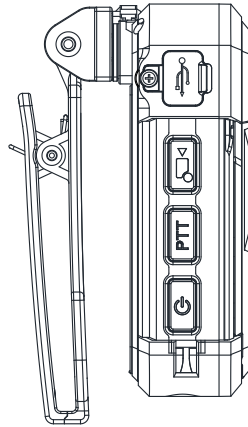


Figure 2-2 Successful Installation

2.2 Uninstall Shoulder Clip

Step 1 Press the buckles on both sides of the clip inwards with your fingers.

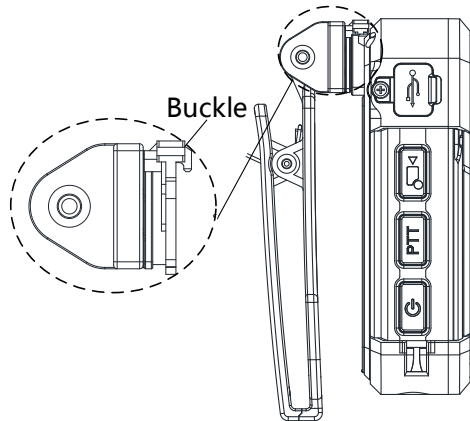


Figure 2-3 Press Buckles

Step 2 Slide the clip upwards to uninstall it.

2.3 Install Battery

When the body camera is in low battery, LED1 flashes in red with high frequency, and the message "Low power." pops up on LCD. In this condition, charge it in time or change the battery.

Step 1 Slide the fastener on the rear panel of the body camera to the left.

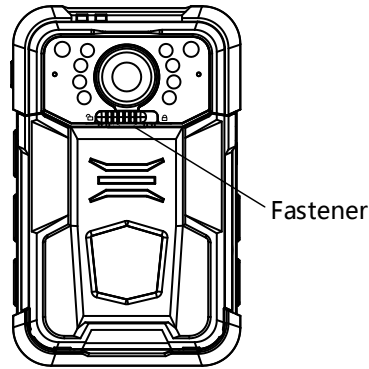


Figure 2-4 Slide Fastener

Step 2 Open the back cover by pulling the protruding handles.

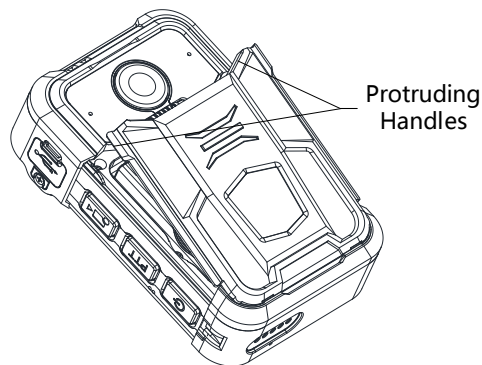


Figure 2-5 Open Back Cover

Step 3 Take the battery out by pulling the battery handle.

Step 4 Change a battery.

Step 5 Install the back cover.

Step 6 Slide the fastener to the right to lock the back cover.

2.4 Install MicroSIM Card

Install a microSIM card on the body camera if you want to connect to the network via microSIM card. Shut down the body camera before the installation.



NOTE

This chapter is only applicable to the model supporting dialing.

Step 1 Open the back cover and take the battery out. Refer to *Chapter 2.3 Install Battery* for details.

Step 2 Open the sheet metal of the card slot, and put the card into the slot with the metal side facing down.

Step 3 Push the sheet metal forwards to lock the card.

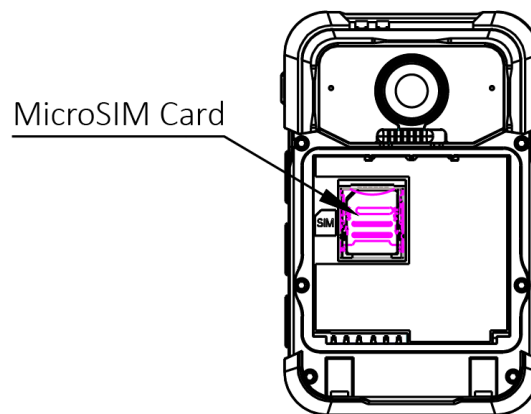


Figure 2-6 Install MicroSIM Card

Step 4 Push the sheet metal forwards to lock the card.

Step 5 Install the battery and back cover.

Step 6 Slide the fastener to the right to lock the back cover.

2.5 Charge Body Camera

Step 1 Open the cover of USB interface on one side of the body camera.

Step 2 Connect the body camera to the charger with the USB data cable.



- When the body camera is being charged, LED 1 is solid red. When it is fully charged, LED 1 is solid green.
- You can enable quick charging mode in system settings. In quick charging mode, the body camera cannot be operated. If quick charging mode is disabled, you can operate the body camera normally when the body camera is being charged.

Chapter 3 Detailed Configuration

Scan the QR code below to get the user manual for detailed configuration.



Figure 3-1 Body Camera User Manual



See Far, Go Further